

# RF Wireless Touching LED Remote Controller


( Brightness Adjusting)

ITEM NO.: SC-Z101D

Working voltage: DC12V/24V

Output control: 1 circuits

Control current: 6A/circuit

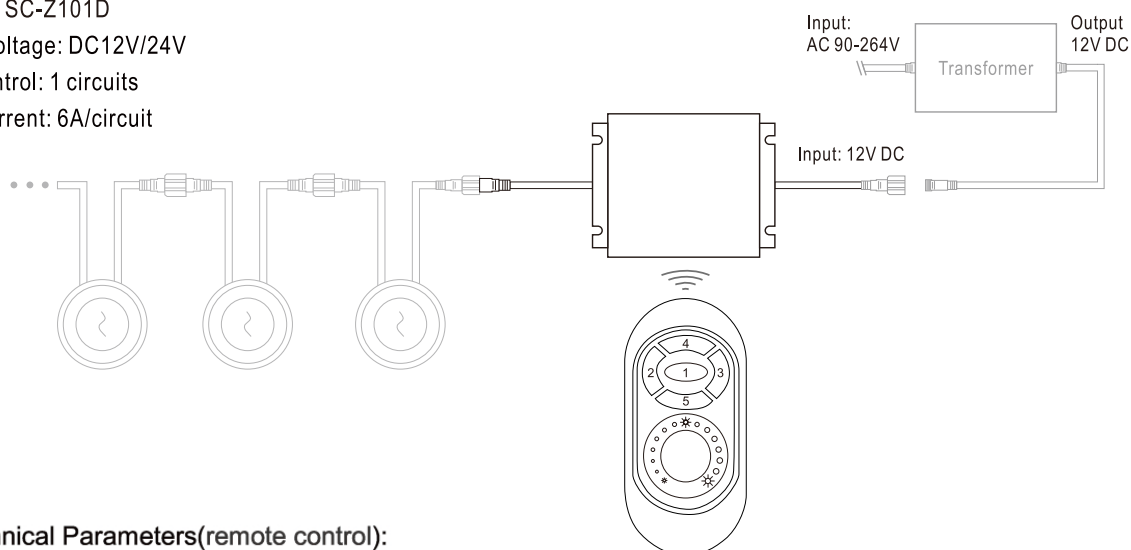

## 1. Technical Parameters(remote control):

1:Power supply: AAA battery

2:Cover material:ABS

3: Fabrication processing: multicolour printing & UV varnish

## 2. Technical Parameters(controller):

1. Working voltage:DC12V/24V

2. Output control: 1circuit

3. Control current: 6A/circuit

4. Dimension: L85\*W64\*H24mm

5. Receiving range:20meters

## 3. Functions of Keys

1. Key 1: flash, change blink speed

2. Key 2: medium brightness

3. Key 3: highest brightness

4. Key 4: on / off

5. Key 5: lowest brightness

## 4. How to use

1. Use your finger to touch the color ring , you can change the brightness from the highest to the lowest (100%-1%,50 grades to adjust).

2. Resume fuction. The previous settings will be resumed while power on again.

3. Matching code

Press Key 4 five times within 3 seconds when power on again, the light will blink 3 times if matching is successful.

Clearing Code

Press Key 3 five times within 3 seconds when power on again,the light will blink 6 times if clearing is successful.

## 5. Caution

Please don't touch or press the color ring while loading the batteries to protect the sensitiveness. Please use the remote controller 3 seconds after the batteries are loaded. Please reload the batteries when you find the color ring is not sensitive.

