

220-240V~ 50Hz



Dette er en universiell trykk/vri-dimmer. Dimmeren kan benyttes i endevendersystem med impulsbryter. Dimmeren detekterer automatisk om lyskilden er fasesnitt eller faseavsnitt.

Min. last avhenger etter hvilken type lyskilde eller elektronisk omformer. Det kan være nødvendig å øke belastningen til 10W.

Må installeres av registrert elektroforetak.

This is a universal push/rotary dimmer. The dimmer may be used in the two way switch wiring system with push switch. The dimmer will auto detect whether the light source is leading or trailing edge.

Min. load depends on the type of light source or electronic converter. It may be necessary to increase the load to 10W.


Must be installed by registered electrical company.

Driftsspenning: 220-240V/AC~ 50Hz
LED lampe: 5-200W
RL modus: 5-200W
RC modus: 5-300W
Elektronisk trafo/halogen: 5-300W
Halogenlampe 240V: 5-300W
Monteres i standard veggboks eller som påvegg
Kortslutningssikring
Overbelastningssikring
Overtemperaturbeskyttelse
Elektronisk utkobling ved lampefeil

Operating voltage: 220-240V/AC ~ 50Hz
LED lamp: 5-200W
RL mode: 5-200W
RC mode: 5-300W
Electronic transformer /halogen: 5-300W
Halogen Lamp 240V: 5-300W
Mounts in the standard electrical box or surface mounting
Short-circuit protection
Over load protection
Over temperature protection
Lamp breakdown protection

KOBLING /WIRING

NB!
Ved flimring, juster skruer./
With flickering, adjust the screw.

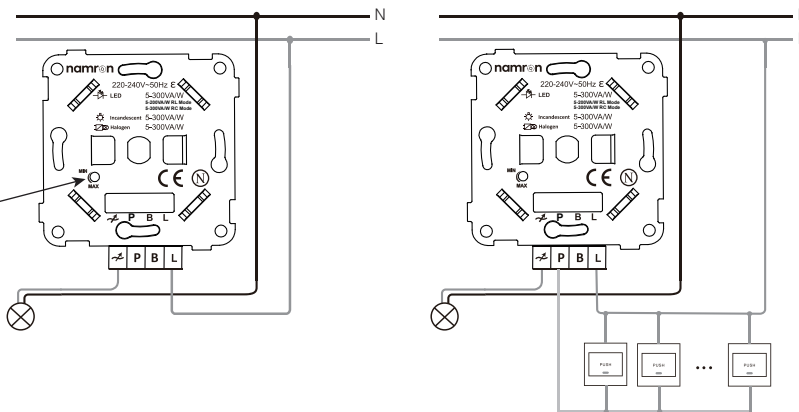

MÅL / MEASURES

