


Various applications • PVC outer sheath and numbered cores



## ÖLFLEX® CLASSIC 110

VDE-registered oil-resistant PVC control cable for a wide range of applications

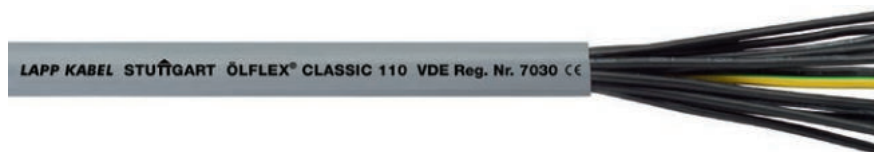

### Info

- CPR: Article number choice under [www.lappkabel.com/cpr](http://www.lappkabel.com/cpr)
- VDE certificate of conformity with factory surveillance



### Benefits

- Wide choice of standardized lengths and individual cuts
- Very broad range, items with up to 100 conductors

### Application range

- For fixed installation as well as occasional flexing at free, non-continuously recurring movement without tensile load
- Dry or damp rooms that are subject to medium mechanical loads
- Suitable for torsional applications which are typical for the loop in wind turbine generators (WTG)
- In power chains for a travelling distance up to 5 m and 0,2 ... 1 million bending cycles, for following dimensions: 0,5 to 2.5mm<sup>2</sup> and 2 to 7 conductors

### Product features

- Flame-retardant according IEC 60332-1-2
- Good chemical resistance, see catalogue appendix T1
- Oil-resistant according to DIN EN 50290-2-22 (TM54)

### Norm references / Approvals

- VDE reg. no. 7030 for the following sizes: up to 2.5 mm<sup>2</sup>: 2 - 65 cores from 4 mm<sup>2</sup>: 2 - 7 cores from 25 mm<sup>2</sup>: 2 - 5 cores

### Product Make-up

- Fine-wire strand made of bare copper wires
- PVC insulation LAPP P8/1
- Cores twisted in layers
- PVC outer sheath, grey (similar RAL 7001)

### Technical data

	<b>Classification ETIM 5/6</b> ETIM 5.0/6.0 Class-ID: EC000104 ETIM 5.0/6.0 Class-Description: Control cable
	<b>Core identification code</b> Black with white numbers acc. to VDE 0293-334
	<b>Conductor stranding</b> Fine wire according to DIN EN 60228 (VDE 0295), class 5 / IEC 60228 class 5
	<b>Torsion movement in WTG</b> TW-0 & TW-1, refer to Appendix T0
	<b>Minimum bending radius</b> Occasional flexing: 10 x outer diameter In power chains: 15 x outer diameter Fixed installation: 4 x outer diameter
	<b>Nominal voltage</b> U <sub>0</sub> /U: 300/500 V
	<b>Test voltage</b> 4000 V
	<b>Protective conductor</b> G = with GN-YE protective conductor X = without protective conductor
	<b>Temperature range</b> Occasional flexing: -15°C to +70°C In power chains: -5°C to +70°C Fixed installation: -40°C to +80°C

Article number	Number of cores and mm <sup>2</sup> per conductor	Standard length (m) and standard packaging							Outer diameter [mm]	Copper index (kg/km)	Weight (kg/km)
		25	50	100	200	300	500	1000			
<b>ÖLFLEX® CLASSIC 110</b>											
1119752	2 X0.5			100	200	300	500	1000	4.8	9.6	35
1119003	3 G0.5			100	200	300	500	1000	5.1	14.4	42
1119753	3 X0.5			100	200	300	500	1000	5.1	14.4	42
1119004	4 G0.5			100	200	300	500	1000	5.7	19.2	54
1119754	4 X0.5			100	200	300	500	1000	5.7	19.2	54
1119005	5 G0.5			100	200	300	500	1000	6.2	24	63
1119755	5 X0.5			100	200	300	500	1000	6.2	24	63
1119007	7 G0.5		50	100	200	300	500	1000	6.7	33.6	81
1119757	7 X0.5		50	100	200	300	500	1000	6.7	33.6	81
1119010	10 G0.5		50	100	200	300	500	1000	8.6	48	116
1119012	12 G0.5		50	100	200	300	500	1000	8.9	58	131
1119014	14 G0.5		50	100			500	1000	9.5	67	153
1119018	18 G0.5		50	100			500	1000	10.5	86.4	188
1119021	21 G0.5		50	100			500	1000	11.7	101	221
1119025	25 G0.5		50	100			500	1000	12.4	120	261
1119030	30 G0.5		50	100			500	1000	13.3	144	304
1119035	35 G0.5		50	100			500	1000	14.5	168	356
1119040	40 G0.5		50	100			500	1000	15.4	192	400
1119052	52 G0.5		50	100			500	1000	17.3	250	517