


Cavity wall, double accessory socket

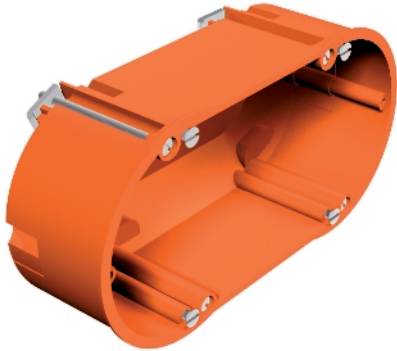

Double accessory socket, for two service units or one double service unit, with four device bolts. Dimensions to DIN 49073-1, for plate thickness 7–35 mm. Standard combination spacing 71 mm, 14 break-out openings for NYM cables, data cables and pipes Ø 20 mm, protection rating IP20.

Type	Milling hole Ø mm	Height mm	Ø max.	Entries	Pipe Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HG 60 2	68	50	–	14	20 mm	10	4,850	2003422

PP Polypropylene

Dimensions

