


[Products](#) / [FLEX LINE](#) / [HF FLEX LINE](#) / FLEX LUB™ ANTI-UV HF

# FLEX LUB™ ANTI-UV HF

ICTANUV 34223

 [Print product sheet](#)

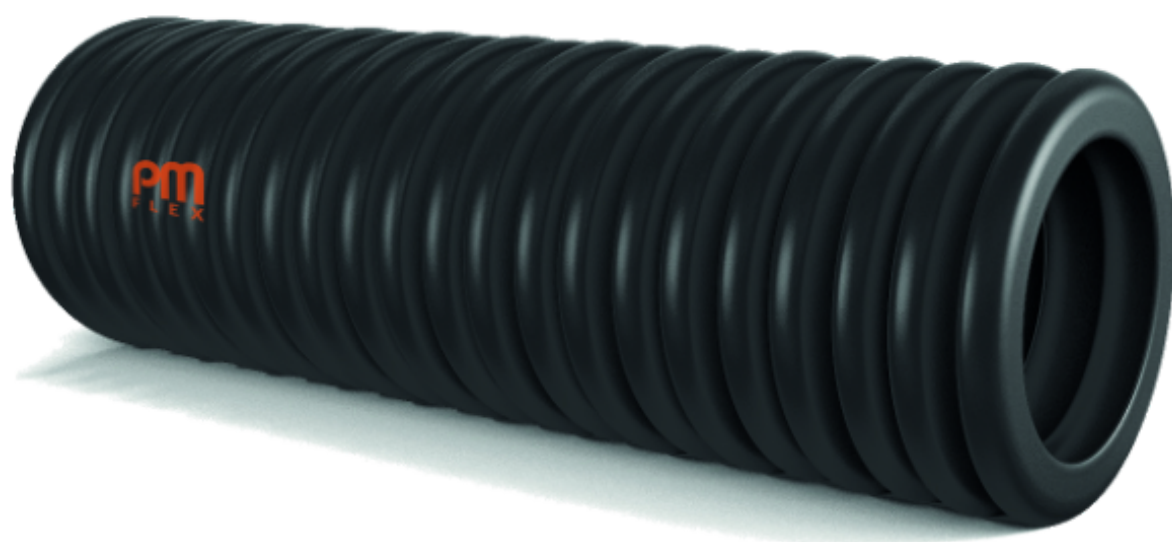

## Benefits:

- UV resistant
- Halogen Free according to European standard EN 50642

## Usage Areas:

Outdoor	<input checked="" type="checkbox"/>
Indoor	<input checked="" type="checkbox"/>
Exposed installations	<input checked="" type="checkbox"/>
Liquid screed and concrete	<input checked="" type="checkbox"/>
Chased wall - Plasterboard	<input checked="" type="checkbox"/>
Chased floor	<input checked="" type="checkbox"/>
False ceiling - Movable wall	<input checked="" type="checkbox"/>
Prefab - Wood panels	<input checked="" type="checkbox"/>

## Certifications

Search ID or free text...



## Packaging

COLOUR	ART. CODE	OUTER DIAMETER (MM)	INNER DIAMETER (MM)	COILS (M)	PALLET (M)
	ICTANUV16RT24	16	10.7	100	2400
	ICTANUV20RT20	20	14.1	100	2000
	ICTANUV25RT12	25	18.2	100	1200
	ICTANUV3225RT24	32	24.2	25	600
	ICTANUV4025RT20	40	32,4	25	500
	ICTANUV5025RT8	50	41.2	25	200

## Technical Information

### Conduit Technical Specification

MATERIAL	Polypropylene
COMPRESSION RESISTANCE	750N (23°C, +/-2°C)
RESISTANCE TO IMPACT	6J (IK08)
MINIMUM OPERATING TEMPERATURE	-5°C
MAXIMUM OPERATING TEMPERATURE	+90°C
BENDING RESISTANCE	Pliable - Self-recovering
INSULATION RESISTANCE	>100MΩ
GLOW WIRE TEST (IEC EN 60695-2)	960°C

### Material Properties

FEATURES	STANDARD	YES/NO
LS - Low Smoke	IEC 61034-2	<input checked="" type="checkbox"/>
HF - Halogen Free	EN 50642 DIN VDE V 0604-2-100	<input checked="" type="checkbox"/>

FEATURES	STANDARD	YES/NO
OH - Zero Halogen	IEC 60754-1; IEC 60754-2	<input checked="" type="checkbox"/>
Fire resistant	EN 61386.1, EN 61386.22	<input checked="" type="checkbox"/>
Self-recovering (of at least 90% of original diameter)	EN 61386.1, EN 61386.22	<input checked="" type="checkbox"/>
Anti-UV	EN 50618:2015-12	<input checked="" type="checkbox"/>
Pre-lubricated (Ø 16 mm, 20 mm, 25 mm)		<input checked="" type="checkbox"/>
Packed with 100% recyclable PE film		<input checked="" type="checkbox"/>