


## Vario quick connector

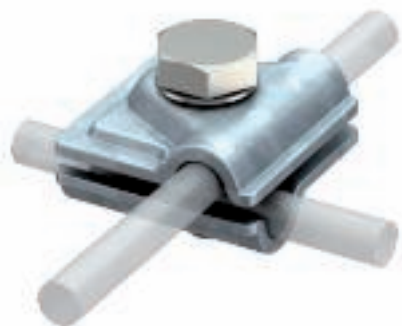

- For T, cross and parallel connectors
- Quick installation using hexagonal bolt M10 x 30, high-grade stainless steel
- Conforms to the requirements according to DIN VDE 0185-305 (IEC 62305)

Type	Fit mm	Dim. A mm	Pack. Weight		Item No.
			pcs	kg/100 pcs.	
249 8-10 ST	Rd 8-10	40	20	10,800	5311500
249 B ST	Rd 8-10	40	100	10,800	5311705

**St** Steel

**FT** Hot-dip galvanised

### Dimensions

