


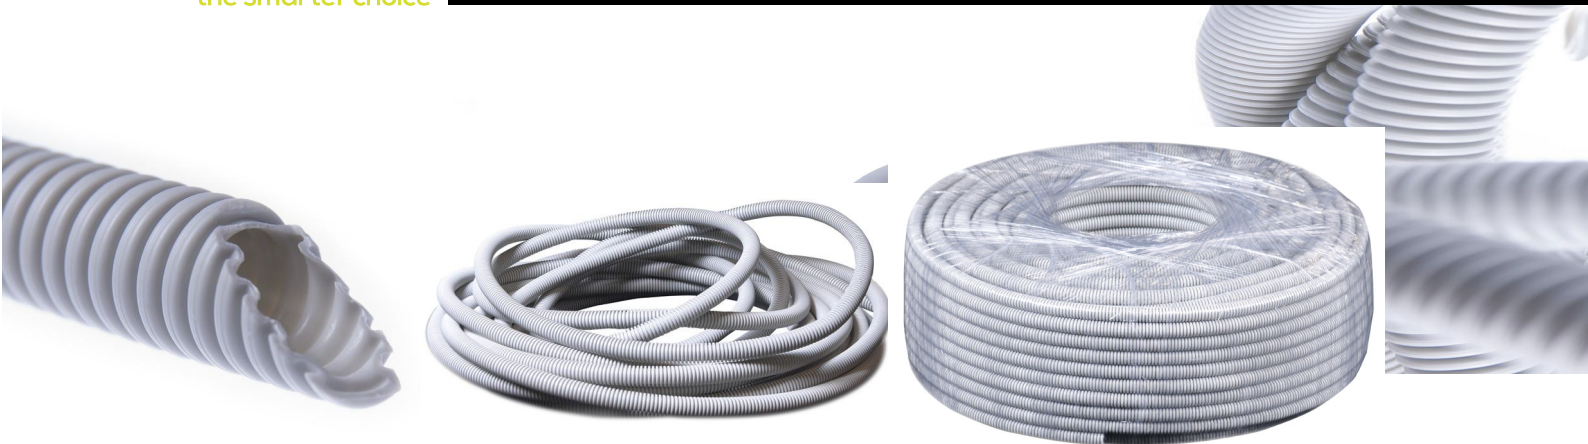

PRODUCT DESCRIPTION

100%
Green
Energy

Self-recovering pliable conduit without wire for diameter 16, 20, 25, 32, 40, 50 mm.
It can be used with cement and concrete. Self-protected: it doesn't need concrete cover.
Eco-friendly: LSF0H (Low Smoke Flame retardant Zero Halogen). Colour: grey (RAL 7037).
Conduit designed for cable protection in building and industrial applications. Ideal for use in locations where there is an increased risk of fire hazard. It is particularly suited for internal installations including cavity walls, ceilings and under raised floors. It can also be buried under concrete. Conduit is produced according to: EN 61386-1; EN 61386-22 standard specifications. Conduit is certified for Intertek Semko in Kista - Stockholm.
The product is made using 100% green energy.
Also all products can be found in technical database: **EFO BASEN** in Norway.

CLASIFICATION CODES ACCORDING IEC 61386



Digit in the clasification code				
	1 Compression strength	2 Impact strength	3 Minimum operating temperature t°	4 Maximum operating temperature t°
Codification number	125N very low	0.5J (0.5kg/100mm) very low	+5°C	+60°C
	320N low	1J (1kg/100mm) low	-5°C	+90°C
	750N medium	2J (2kg/100mm) medium	-15°C	+105°C
	1250N high	6J (2kg/300mm) high	-25°C	+125°C
	4000N very high	20.4J (6.8kg/300mm) very high	-45°C	+150°C
				6 +250°C

Material: halogen-free material (PP)
Compression strength 750 N/5cm

Temperature-resistance from - 5°C to + 90°C
Self-extinguishing
Corrosion- resistant

APPLICATIONS

Outdoor **No**
Indoor **Yes**
Exposed Installation **No**
Liquid screed and concrete **Yes**

Chased wall - Plasterboard **Yes**
Chased floor **Yes**
False ceiling - Movable wall **Yes**
Prefab - Wood panels **Yes**

PRODUCT DIMENSIONS

Outside OD, mm	16.0	20.0	25.0	32.0	40.0	50.0
Inside ID, mm	11.4	14.2	18.4	23.9	30.7	39.4
Coil, m	50 / 100*	50 / 100*	25	25	25	25
On pallet, m	According to individual requests and pallet sizes					

* 100m coil available for K-rør Speed variants (low friction)

PRODUCT CODES FOR EMPTY PIPES

El-nr	Produkt
1263733	Namron K-rør 16mm 50m
1263734	Namron K-rør 20mm 50m
1263740	Namron K-rør 25mm 25m
1263735	Namron K-rør 32mm 25m
1263736	Namron K-rør 40mm 25m
1263737	Namron K-rør 50mm 25m
1263738	Namron K-rør Speed 16mm 100m
1263739	Namron K-rør Speed 20mm 100m