




Part no. : 531

Connector AM-TOP

with cable sleeve

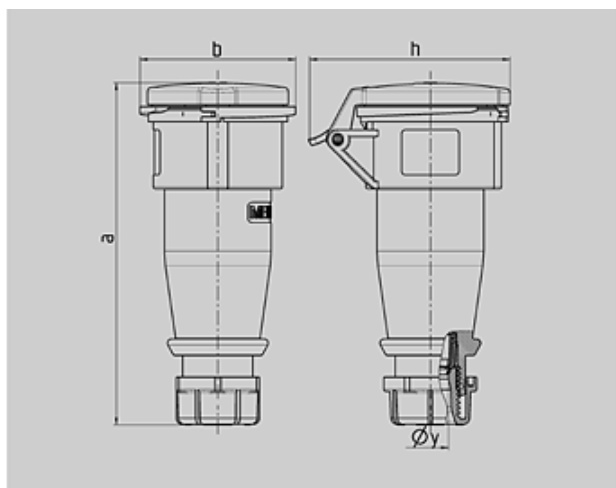

Drawing	Amp.	16			32		
		Poles			Poles		
3 MB 63		3	4	5	3	4	5
Dim. in mm	a	162	165	167	209	209	208
	b	60	68	76	82	82	89
	h	83	92	98	100	100	108
	y	14,5	16	16	22	22	22
Terminal for cond. cross section (mm²) min.-max.		1 —2,5	1 —2,5	1 —2,5	2,5 —6	2,5 —6	2,5 —6

Article-group : **3141**

voltages : 230V

rated current : 32A

pole : 5 pole

IP protection types : IP44

position of ground contact : 9h

packing unit : 0010

weight : 300 g

PART NUMBERS

		V	110V	230V	400V	500V	>50-500V	
		Hz	50,60	50,60	50,60	50,60	100-300	300-500
		colour						
		amp.						
16 A	3		509	510	511		2441	2517
	4		512	513	514	515	516	517
	5		518	519	5	2026	2193	2495
32 A	3		521	522	523		2196	2674
	4		524	525	526	527	528	529
	5		530	531	6	2027	2245	2493