

ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 INOX WALL-MOUNTING CABINET 400x600x200 316L

Reference: INX406020-316

Characteristics:

Product type:	316L Stainless steel wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 400x600x200 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	5-mm double-bit zamak lock - One 1-point lock
Finish:	Scotch 320 satin finish.
Colour:	-
Mounting plate:	With flat mounting plate. 2-mm galvanised sheet steel
Weight (Kg):	12,89
Materials:	AISI 316L stainless steel. Injected polyurethane sealing gasket.

Technical data:

Degree of protection:	IP66 / NEMA 1, 12, 4x
Resistance to impact:	IK10
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC
Corrosion resistance:	-

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208 / UNE-EN 61439-1 (as applicable).
Certificates:	UL508A




ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 INOX WALL-MOUNTING CABINET 400X600X200 316L

Reference: INX406020-316

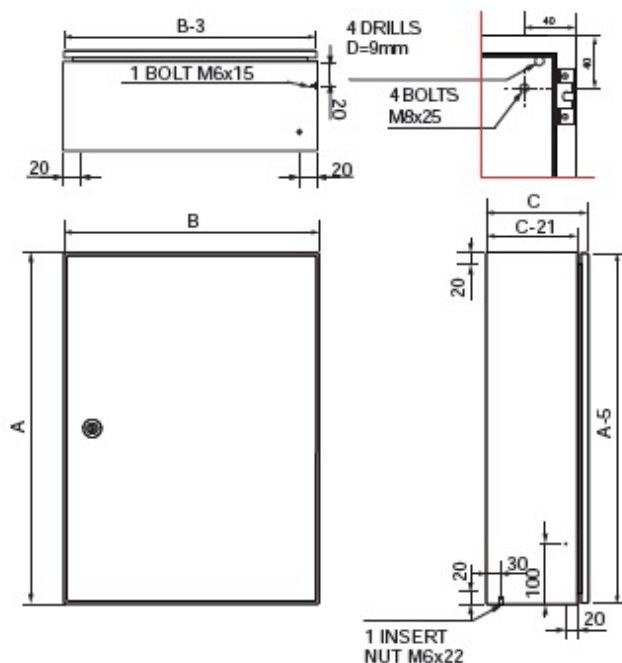

Pictures and drawings are standards. To get more details please surf www.ide.es to download those files (pdf, dxf, igs).

Dimensions cabinet:	(AxBxC) 400x600x200 mm	Cable entry:	-
Body to be flush-fitted:	-	Wall fixing:	(Height x Width) 360x560 mm
Inside usable space:	(Height x Width x Depth) 350x550x179 mm		

Sustainability:

RoHS - REACH

Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. The cabinet is protected by a plastic bag. Mounting plate is supplied unassembled inside the packaging.

Product end of life:

It does not require specific recycling operations.

Recommended applications

Industrial environments and outdoor facilities with aggressive agents or saline environments, food, chemical and petrochemical industries, where a high degree of hygiene is required. Sea ports and areas with a high salt or chlorine concentration.