

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Namron

**Supplier's address:** customer service, Nedre kalbakkvei 88B, 1081 Oslo, NO

**Model identifier:** 3220258

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	10,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	98
Outer dimensions without separate control gear, lighting control	Height	40	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	95	
	Depth	40	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	10
		Chromaticity coordinates (x and y)	0,453 0,411
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 314	Beam angle in degrees, or the range of beam angles that can be set	38
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	84	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi$ 1)	0,50	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1

(a) '-': not applicable;

(b) '-': not applicable;


## Spectrum Test Report

Sample :  
Specification : 3220258  
Sample No. : 1  
Manufacturer :  
Date : 2022-10-17 14:34:10  
Sam. Status :  
Instrument : HAAS-2000(EVERFINE)  
Test by : ADMIN  
Assessor : admin

### Test Condition

Temperature : 85Deg  
WL Range : 380nm-780nm  
Test Mode : Fast Test  
RH : 65.0%  
IP : 48042 (73%)  
T : 377 ms  
Sensitivity : High

### Spectrum

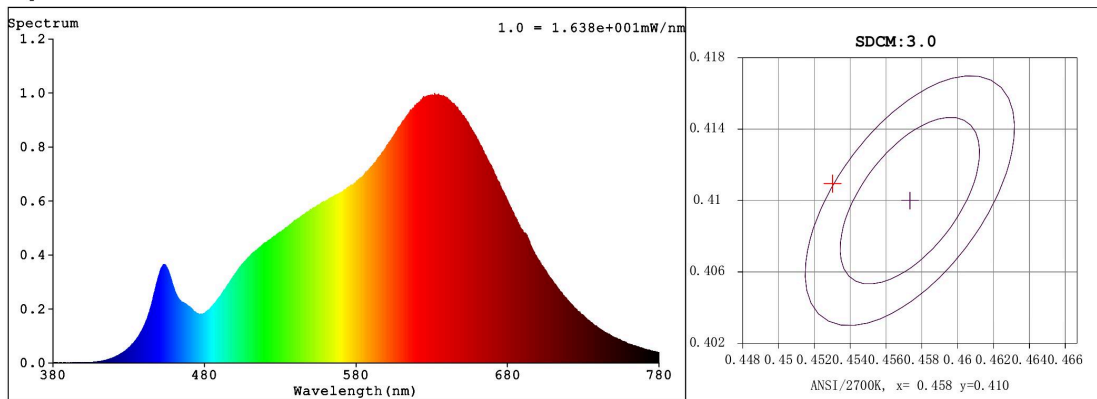

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4535$   $y = 0.4110$  /  $u' = 0.2582$   $v' = 0.5266$  ( $duv=7.46e-04$ )  $Dx, Dy: 0.0012, 0.0023$

CCT= 2795K Prcp WL:  $L_d=583.5nm$  Purity=59.5%

Peak WL:  $L_p=632nm$  FWHM: =155.5nm Ratio:R=26.3% G=71.1% B=2.6%

Render Index:  $R_a = 97.5$  AvgR = 95.7 TM30:Rf=96 Rg=101

R1 =99 R2 =99 R3 =96 R4 =99 R5 =98 R6 =98 R7 =97

R8 =93 R9 =84 R10=95 R11=98 R12=87 R13=99 R14=97 R15=96

LEVEL:OUT WHITE:ANSI\_2700K

CQS Parameters:  $Q_a = 97.1$  GAI Parameters:  $GAI\_EES = 50.4$ ,  $GAI\_BB8:98.0$ ,  $GAI\_BB15:102.3$  TLCI Parameters:  $COI:5.24$

### Photometric & Radiometric Parameters

Flux = 764.55 lm Eff. : 77.15 lm/W Fe = 2.8408 W

Scotopic:1032 S/P:1.3499 (EQE):2943.1%

Flux of emitted photons( $\mu mol/s$ ):14.3 Flu. and blue light ratio:14.38 Fluorescent eff.:257.7

B:  $2.7055e+003mW$

### Electrical parameters

V = 231.0 V I = 0.04464 A P = 9.910 W PF = 0.9612

Kdisp(IEC) = 0.9776 Freq=49.99 Hz


### GBT5702

Gamut Index:  $G_a=1.0$

C1 =99 C2 =88 C3 =80 C4 =98 C5 =99 C6 =89 C7 =85

C8 =96 C9 =97 C10=83 C11=100 C12=85 C13=98 C14=86 C15=98

Model placed on the Union market from 01/09/2022



**EPREL registration number:** 1392059

<https://eprel.ec.europa.eu/qr/1392059>

**Supplier:** NAMRON AS (Importer)

**Website:** [www.namron.com](http://www.namron.com)

**Customer care service:**

**Name:** customer service

**Website:** [www.namron.com](http://www.namron.com)

**Email:** [post@namron.com](mailto:post@namron.com)

**Phone:** 22 81 27 70

**Address:**

Nedre kalbakkvei 88B

1081 Oslo

Norway