

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: customer service, Nedre kalbakkvei 88B, 1081 Oslo, NO

Model identifier: 3220261

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	730 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	98
Outer dimensions without separate control gear, lighting control	Height	55	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	95	
	Depth	95	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	10
		Chromaticity coordinates (x and y)	0,459 0,414
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 185	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	88	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ 1)	0,50	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

Sample :
Specification : 3234653
Sample No. : 4
Manufacturer : EVERFINE


Date : 2021-04-23 09:48:21
Sam. Status :
Instrument : HAAS-2000(EVERFINE)
Test by : DAMIN
Assessor : damin

Test Condition

Temperature : 85Deg
WL Range : 350nm-1000nm
Test Mode : Fast Test

RH : 65.0%
IP : 50064 (76%)
T : 382 ms
Sensitivity : High

Spectrum

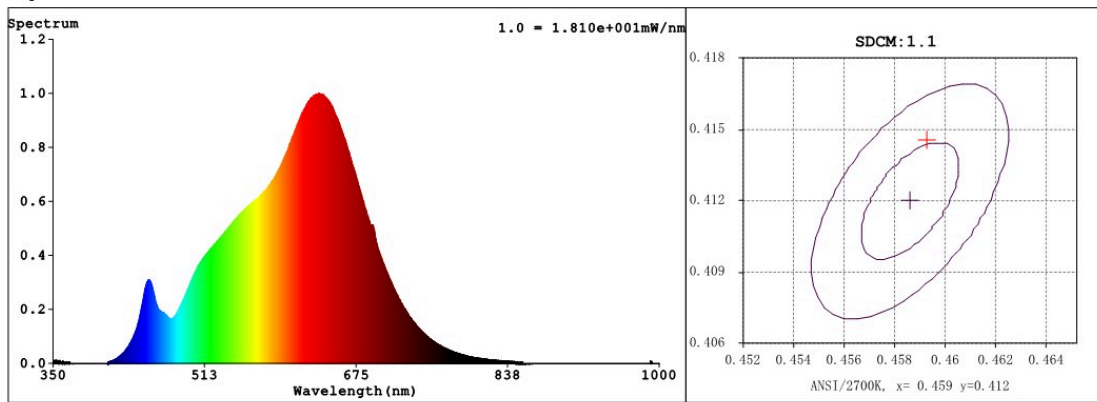

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4597$ $y = 0.4144$ / $u' = 0.2607$ $v' = 0.5288$ ($duv=1.42e-03$) $Dx, Dy: 0.0024, 0.0044$

CCT= 2732K Prcp WL: $L_d=583.6nm$ Purity=62.4%

Peak WL: $L_p=636nm$ FWHM: $=155.7nm$ Ratio: R=26.7% G=70.8% B=2.5%

Render Index: $R_a = 98.0$ AvgR = 96.4 TM30:Rf=96 Rg=100

R1 =99 R2 =99 R3 =96 R4 =99 R5 =99 R6 =99 R7 =99

R8 =96 R9 =88 R10=95 R11=97 R12=89 R13=99 R14=97 R15=97

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 780.72 lm Eff. : 76.14 lm/W $F_e = 2.9843 W$

(EQE):3022.8%

Flux of emitted photons($\mu mol/s$):14.957 Fluo. and blue light ratio:15.95 Fluorescent eff.:251.8


B: $2.9843e+003mW$

Electrical parameters

V = 230.8 V I = 0.04832 A P = 10.25 W PF = 0.9193

Kdisp(IEC) = 0.9554 Freq=49.99 Hz

Model placed on the Union market from 05/11/2022



EPREL registration number: 1394008

<https://eprel.ec.europa.eu/qr/1394008>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: customer service

Website: www.namron.com

Email: post@namron.com

Phone: 22 81 27 70

Address:

Nedre kalbakkvei 88B

1081 Oslo

Norway