

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: Namron AS, Nedre kalbakkvei 88B, 1081, Oslo, Norway

Model identifier: 3222207

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	300 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	3,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	98
Outer dimensions without separate control gear, lighting control	Height	15	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	70	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	3
		Chromaticity coordinates (x and y)	0,459 0,413
Parameters for directional light sources:			
Peak luminous intensity (cd)	567	Beam angle in degrees, or the range of beam angles that can be set	38
Parameters for LED and OLED light sources:			
R9 colour rendering index value	92	Survival factor	0,90
the lumen maintenance factor	0,96		

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

Sample :
Specification : 3222207
Sample No. : 5
Manufacturer : EVERFINE


Date : 2020-06-18 19:33:03
Sam. Status :
Instrument : HAAS-2000(EVERFINE)
Test by : DAMIN
Assessor : damin

Test Condition

Temperature : 25Deg
WL Range : 350nm-1000nm
Test Mode : Fast Test

RH : 65.0%
IP : 50862 (78%)
T : 1045 ms
Sensitivity : High

Spectrum

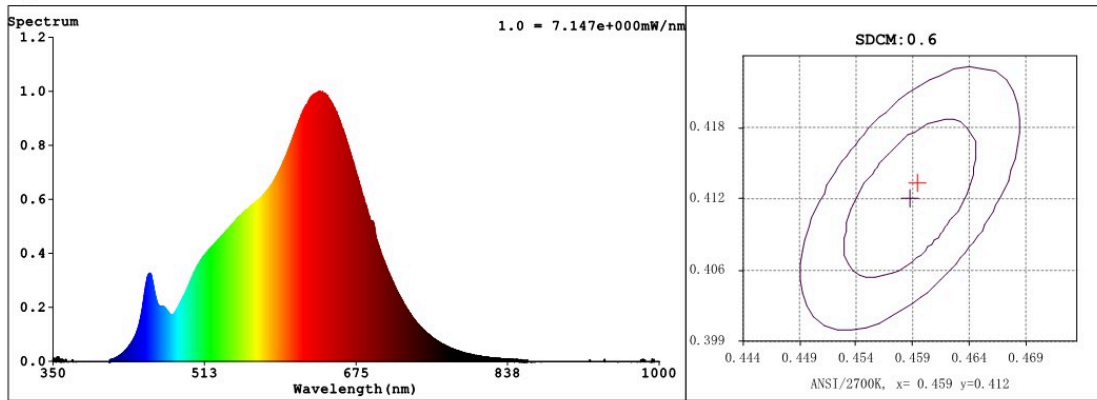

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4597$ $y = 0.4134$ / $u' = 0.2611$ $v' = 0.5284$ ($duv=1.05e-03$) $Dx, Dy: 0.0018, 0.0033$

CCT= 2725K Prcp WL: $L_d=583.8nm$ Purity=62.1%

Peak WL: $L_p=637nm$ FWHM: =154.0nm Ratio:R=27.0% G=70.4% B=2.6%

Render Index: $R_a = 98.4$ $AvgR = 97.1$

R1 =99 R2 =100 R3 =97 R4 =98 R5 =100 R6 =98 R7 =99

R8 =97 R9 =92 R10=98 R11=96 R12=90 R13=99 R14=97 R15=98

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 303.69 lm Eff. : 46.81 lm/W $F_e = 1.1774 W$

(EQE):1229.6%

Flux of emitted photons($\mu mol/s$):5.9057 Fluo. and blue light ratio:16.29 Fluorescent eff.:102.4


B: $1.1774e+003mW$

Electrical parameters

V = 230.8 V I = 0.04694 A P = 6.488 W PF = 0.5987

Kdisp(IEC) = 0 Freq=49.89 Hz

Model placed on the Union market from 01/09/2021



EPREL registration number: 798342

<https://eprel.ec.europa.eu/qr/798342>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: Namron AS

Website: www.namron.com

Email: post@namron.com

Phone: +47 2281 2770

Address:

Nedre kalbakkvei 88B, 1081, Oslo, Norway