

BRUKSANVISNING
INSTRUCTION MANUAL
SKINNESPOT 3-FAS






100-240VAC~50/60Hz IP20






Total Effekt:	40W	Total Power:	40W
LED effekt:	37W	LED power:	37W
Lumen chip:	4430lm	Lumen chip:	4430lm
Lumen spot:	3900lm	Lumen spot:	3900lm
Ra:	90	Ra:	90
SDCM:	≤3	SDCM:	≤3
LED Chip:	Luminus	LED Chip:	Luminus
Fargetemperatur:	4000K	Colour Temperature:	4000K
Lysspredning:	38°	Beam Angle:	38°
Roterbar: 350°	Tilt: 90°	Rotoary: 350°	Tilt: 90°
Tetthetsgrad:	IP20	IP Rating:	IP20
Levetid:	50.000 timer L90	Lifetime:	50,000 hours L90

INSTALLASJON/INSTALLATION

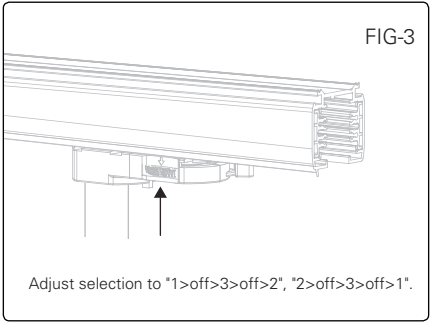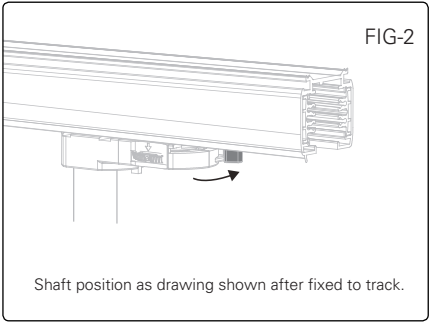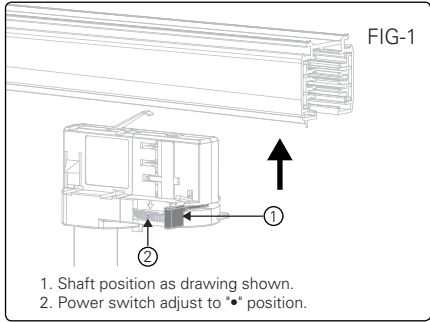


VED DEMONTERING/REMOVAL

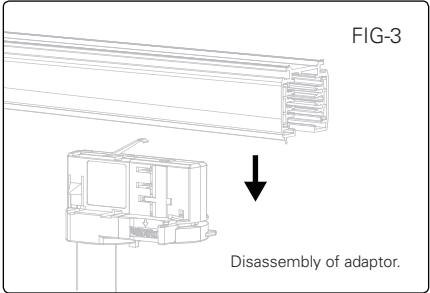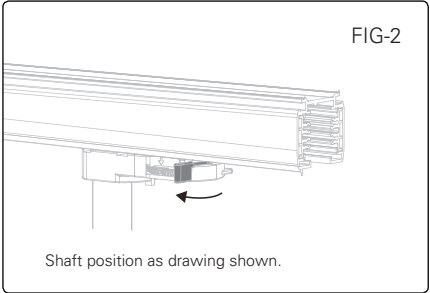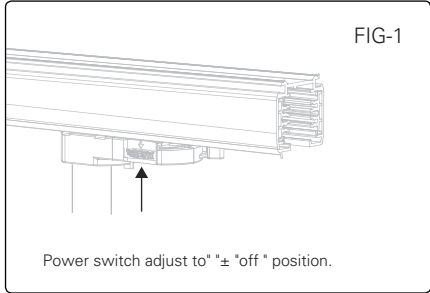


MÅL / MEASURES

PASSER SKINNER FRA/FITS
Staff
Norlux
Global
Nuco
Nordic

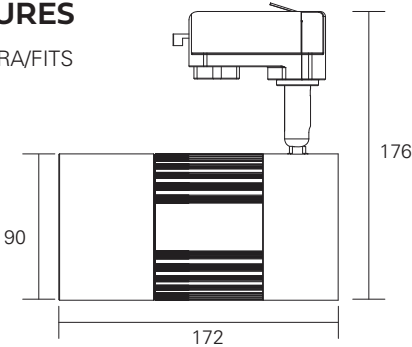

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: F
This product contains a light source of energy efficiency class: F