

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: Namron AS, Nedre kalbakkvei 88B, 1081, Oslo, Norway

Model identifier: 3234640

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2000...2800
On-mode power (P_{on}), expressed in W	8,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	8	
		Chromaticity coordinates (x and y)	0,444 0,403	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 165	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	95	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,1	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

Sample :
Specification : 3234640
Sample No. : 2
Manufacturer : EVERFINE


Date : 2021-06-09 09:08:48
Sam. Status :
Instrument : HAAS-2000(EVERFINE)
Test by : DAMIN
Assessor : damin

Test Condition

Temperature : 85Deg
WL Range : 350nm-1000nm
Test Mode : Fast Test

RH : 65.0%
IP : 45007 (69%)
T : 415 ms
Sensitivity : High

Spectrum

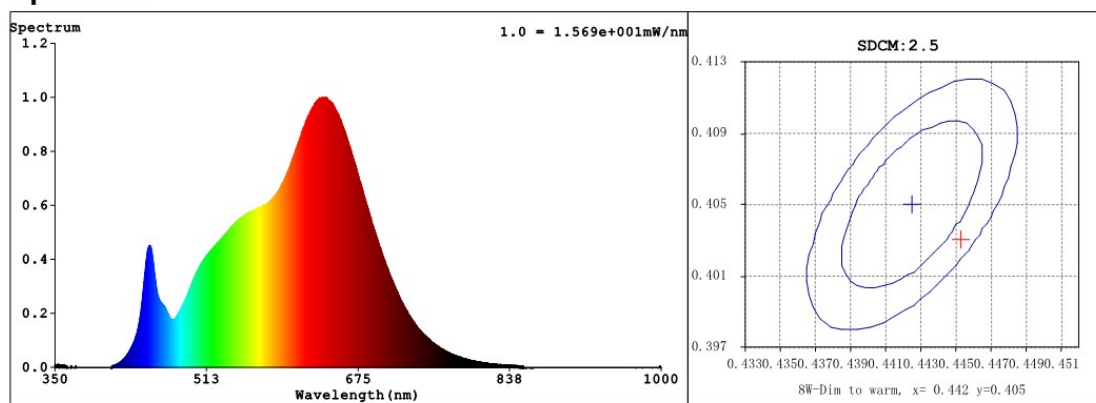

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4448$ $y = 0.4030$ / $u' = 0.2561$ $v' = 0.5222$ ($duv = -1.39e-03$) $Dx, Dy: -0.0022, -0.0042$

CCT= 2864K Prcp WL: $L_d = 583.9nm$ Purity=54.5%

Peak WL: $L_p = 637nm$ FWHM: $=158.6nm$ Ratio: R=26.4% G=70.8% B=2.8%

Render Index: $R_a = 96.7$ AvgR = 95.9

R1 =96 R2 =99 R3 =95 R4 =95 R5 =97 R6 =97 R7 =98

R8 =97 R9 =95 R10=99 R11=92 R12=90 R13=97 R14=96 R15=97

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 668.42 lm Eff. : 85.35 lm/W $F_e = 2.6308 W$

(EQE):3333.9%

Flux of emitted photons($\mu mol/s$):13.146 Fluo. and blue light ratio:13.25 Fluorescent eff.:275.2


B: $2.6307e+003mW$

Electrical parameters

V = 231.0 V I = 0.03850 A P = 7.832 W PF = 0.8808

Kdisp(IEC) = 0.9366 Freq=49.99 Hz

Model placed on the Union market from 01/09/2021



EPREL registration number: 797183

<https://eprel.ec.europa.eu/qr/797183>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: Namron AS

Website: www.namron.com

Email: post@namron.com

Phone: +47 2281 2770

Address:

Nedre kalbakkvei 88B, 1081, Oslo, Norway