

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: Namron AS, Address: Nedre kalbakkvei 88B, 1081, Oslo, Norway

Model identifier: 3234652

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	700 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	98
Outer dimensions without separate control gear, lighting control	Height	40	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	95	
	Depth	40	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	10
		Chromaticity coordinates (x and y)	0,400 0,400
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 194	Beam angle in degrees, or the range of beam angles that can be set	38
Parameters for LED and OLED light sources:			
R9 colour rendering index value	90	Survival factor	0,90
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,1

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

Sample :
Specification : 3234652
Sample No. : 3
Manufacturer : EVERFINE


Date : 2021-03-23 14:12:12
Sam. Status :
Instrument : HAAS-2000(EVERFINE)
Test by : DAMIN
Assessor : damin

Test Condition

Temperature : 85Deg
WL Range : 350nm-1000nm
Test Mode : Fast Test

RH : 65.0%
IP : 57629 (88%)
T : 462 ms
Sensitivity : High

Spectrum

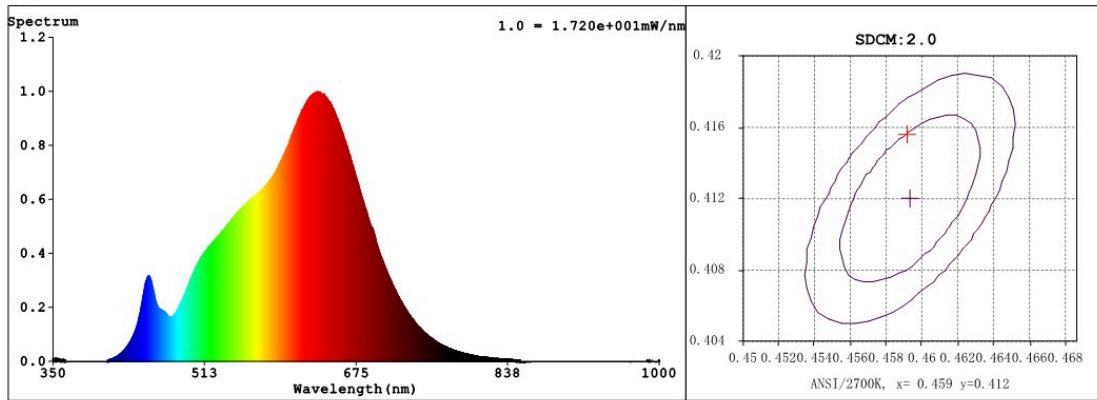

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4588$ $y = 0.4156$ / $u' = 0.2596$ $v' = 0.5291$ ($duv=1.93e-03$) $Dx, Dy: 0.0033, 0.0060$

CCT= 2753K Prcp WL: $L_d=583.3nm$ Purity=62.5%

Peak WL: $L_p=634nm$ FWHM: $=155.6nm$ Ratio: R=26.5% G=71.0% B=2.5%

Render Index: $R_a = 97.7$ AvgR = 95.9 TM30:Rf=96 Rg=100

R1 =99 R2 =98 R3 =95 R4 =99 R5 =98 R6 =98 R7 =98

R8 =95 R9 =86 R10=94 R11=97 R12=88 R13=99 R14=96 R15=96

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 750.77 lm Eff. : 75.56 lm/W Fe = 2.8455 W

Scotopic:991.58 S/P:1.3208 (EQE):2979.6%

Flux of emitted photons($\mu mol/s$):14.247 Fluo. and blue light ratio:15.98 Fluorescent eff.:248.3

B: $2.8455e+003mW$

Electrical parameters

V = 231.0 V I = 0.04669 A P = 9.936 W PF = 0.9212

Kdisp(IEC) = 0.9542 Freq=49.99 Hz


GBT5702

Gamut Index: $G_a=1.0$

C1 =100 C2 =88 C3 =79 C4 =97 C5 =98 C6 =89 C7 =90

C8 =98 C9 =98 C10=82 C11=99 C12=85 C13=99 C14=85 C15=99

Model placed on the Union market from 01/09/2021



EPREL registration number: 721718

<https://eprel.ec.europa.eu/qr/721718>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: Namron AS

Website: www.namron.com

Email: post@namron.com

Phone: +47 2281 2770

Address:

Address: Nedre kalbakkvei 88B, 1081, Oslo, Norway