

BRUKSANVISNING
INSTRUCTION MANUAL
LED PAI
15W / 19W / 21W

namron









220-240V~50/60Hz IP20


Total Effekt: 15W/19W/21W
LED effekt: 12,5W/16W/17,8W
Driver: 350mA/400mA/500mA
Lumen: 1570lm/1900lm/2000lm
Ra: 82
SDCM: 4
LED Chip: HONGLITRONIC
Fargetemperatur: 3000K
Lysspredning: 110°
Tetthetsgrad: IP20
Levetid: 35.000 timer L90

Total Power: 15W/19W/21W
LED power: 12.5W/16W/17.8W
Driver: 350mA/400mA/500mA
Lumen: 1570lm/1900lm/2000lm
Ra: 82
SDCM: 4
LED Chip: HONGLITRONIC
Colour Temperature: 3000K
Beam Angle: 110°
IP Rating: IP20
Lifetime: 35,000 hours L90


Inkludert dimbar driver med 3m kabel og støpsel /
Included dimmable driver with 3m cable and plug

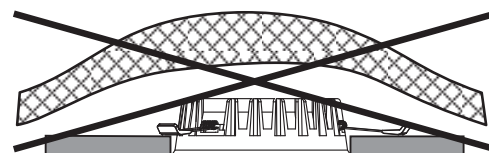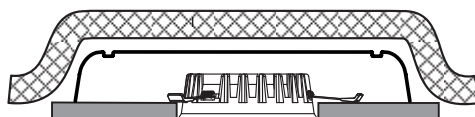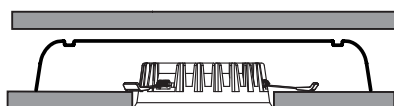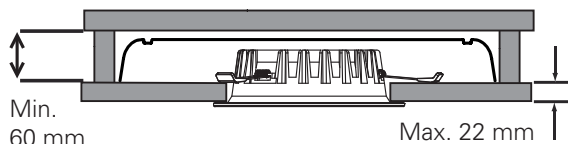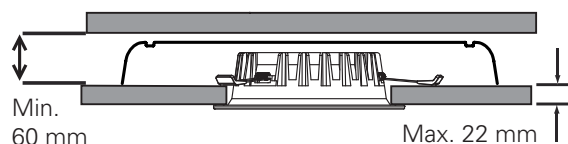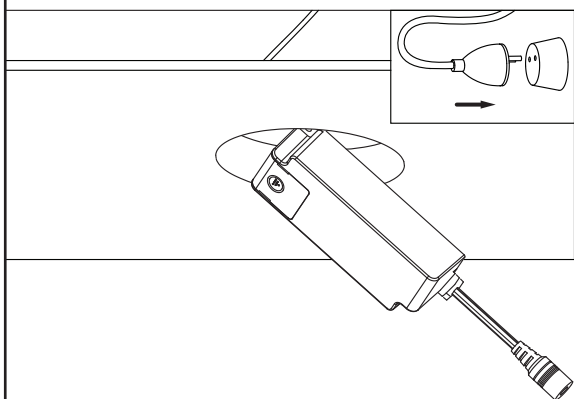


MÅL / MEASURES

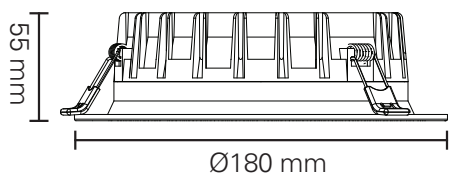

Cut out: Ø135-165mm

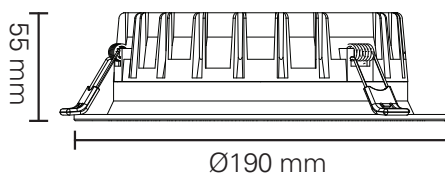


Cut out: Ø150-175mm

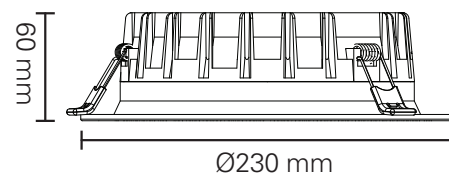

Cut out: Ø195-215mm

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.
This product contains a light source of energy efficiency class: see table or label.

El-nr	Produkt	Effekt(W)	energieffektivitetsklasse forlys
3234690	LED PAI 180mm 15W IP20 HVIT	15	F
3234691	LED PAI 190mm 19W IP20 HVIT	19	F
3234692	LED PAI 230mm 21W IP20 HVIT	21	F