

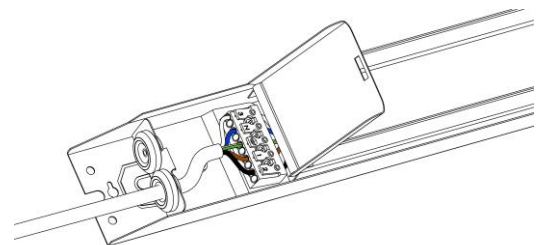
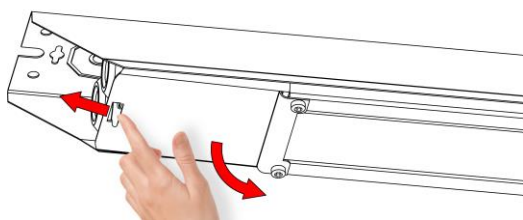


NAMRON CERES ÅPEN INDUSTRI

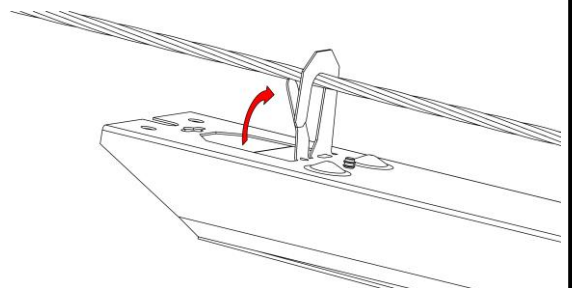


Spenning	230V AC 50/60Hz 186-250VDC	Voltage	230V AC 50/60Hz 186-250VDC
Effekt	85W	Power	85W
Lysutbytte	12015 lm	Light output	12015 lm
Kapslingsklasse	IP23	Ingress protection	IP23
Fargetemperatur	4000K	Color temperature	4000K
Spredningsvinkel	90°	Light distribution	90°
Fargegjengiving (CRI)	>80	Color rendering (CRI)	>80
MacAdams	SDCM ≤ 3	Color consistency	SDCM ≤ 3
Levetid @Ta 25°C	100.000t L80	Lifetime @Ta 25°C	100.000h L80



Montasje

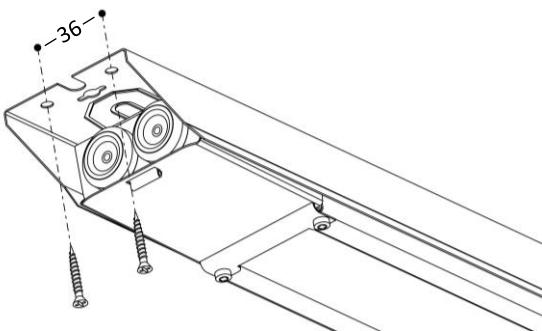

Tilkobling/connections:
Armaturen tilkobles N+1+jord. 2 og 3 er for gjennomgangskobling
Connect to N+1+ground. Use 2 and 3 for through wiring

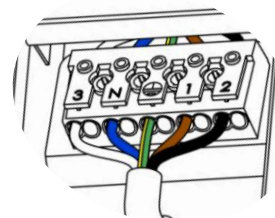

Målskisse

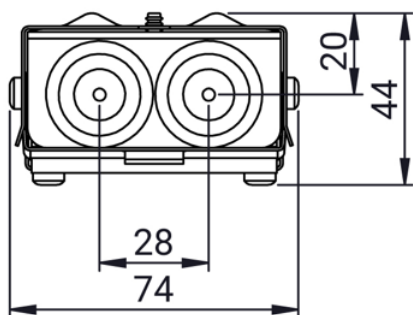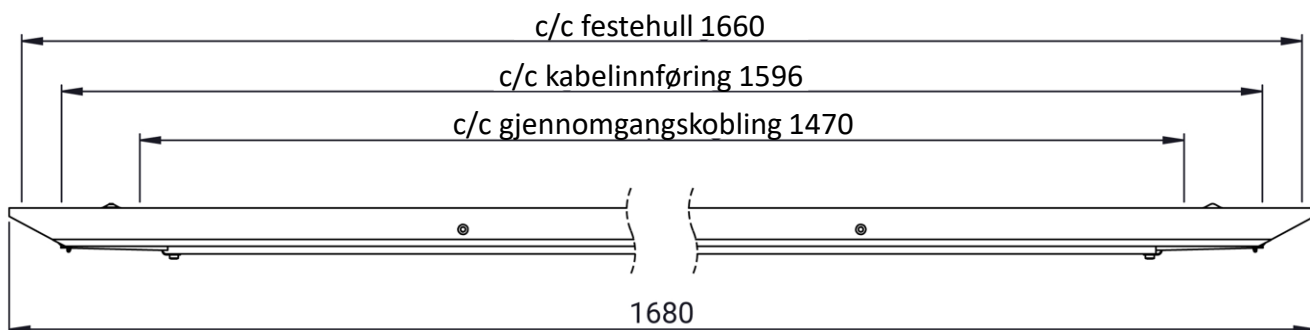

Sikringstabell/Max number per cercuit braker			
B10	B16	C10	C16
16	26	26	44

Startstrøm 9A Varighet 65µs

Inrush Current 9A Duration 65µs

Ved isolasjonsmåling/megging må L og N kobles sammen.
For insulation test, L and N must be connected