

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: Namron AS, Nedre kalbakkvei 88B 1081Oslo, NO

Model identifier: 3220222

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	other electric interface		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 200 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	50,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	215	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	186	
	Depth	320	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,377 0,378
Parameters for directional light sources:			
Peak luminous intensity (cd)	2 100	Beam angle in degrees, or the range of beam angles that can be set	100
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;


(b) '-': not applicable;

Spectrum

1.0 = 7.953e+000mW/nm

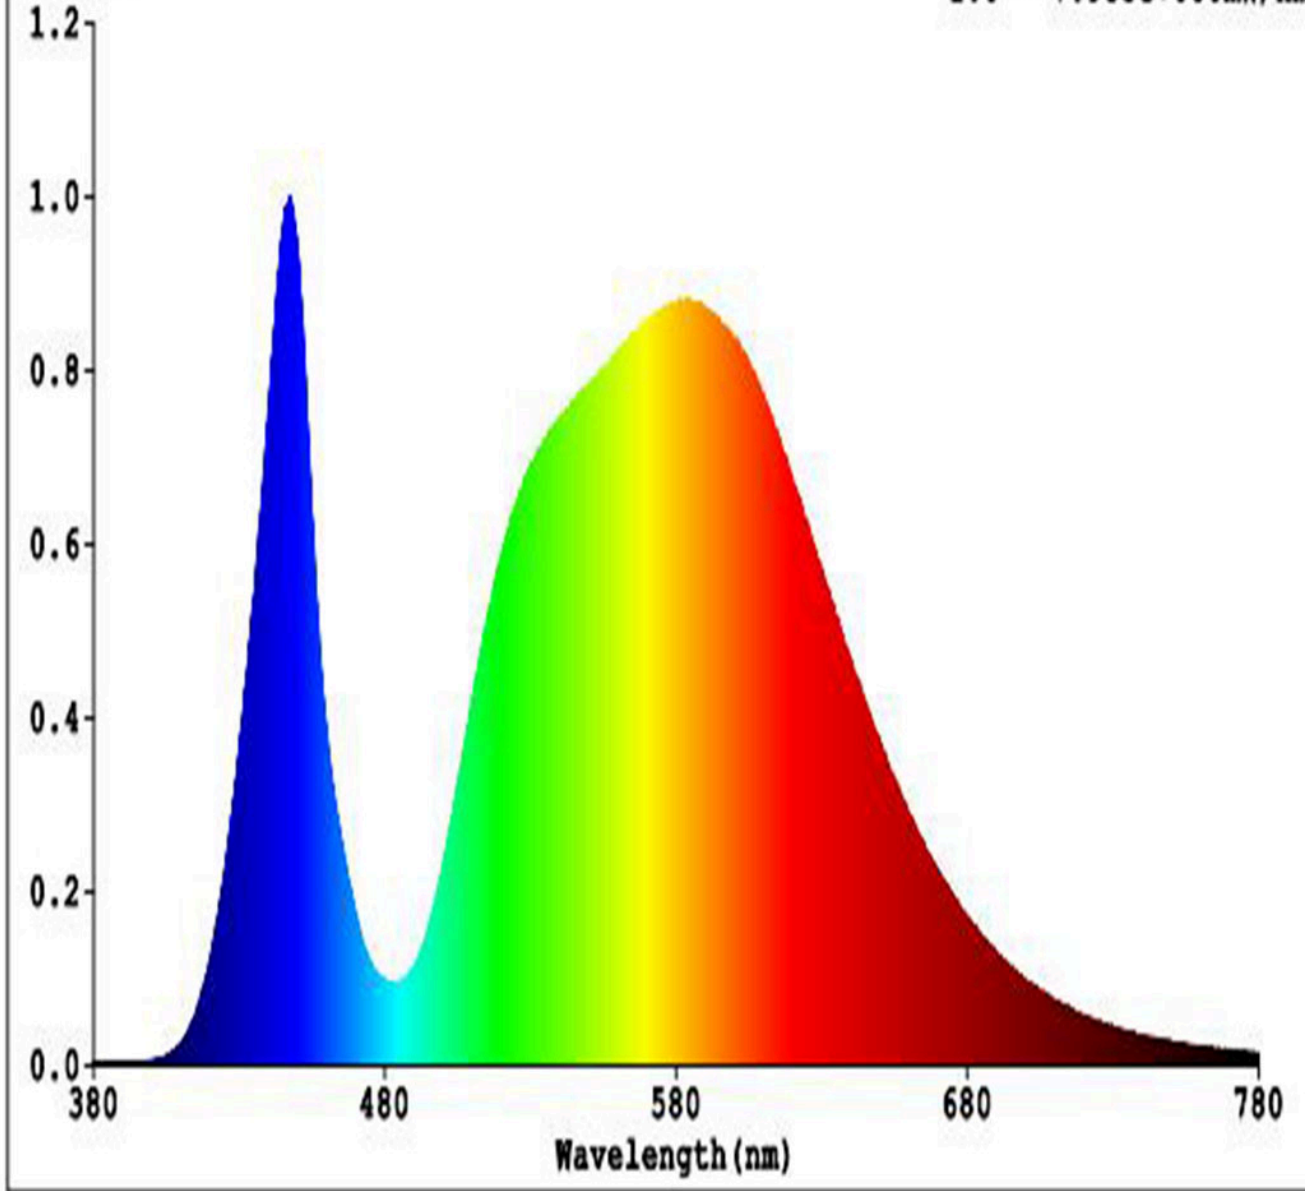

Model placed on the Union market from 01/09/2021



EPREL registration number: 781730

<https://eprel.ec.europa.eu/qr/781730>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: Namron AS

Website: www.namron.com

Email: post@namron.com

Phone: +47 2281 2770

Address:

Nedre kalbakkvei 88B 1081Oslo
Norway