

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: customer service, Nedre kalbakkvei 88B, 1081 Oslo, NO

Model identifier: 3220264

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	660 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2000...2800
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	10	
		Chromaticity coordinates (x and y)	0,440 0,404	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 184	Beam angle in degrees, or the range of beam angles that can be set	35	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	93	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

Sample :
Specification : 3220264
Sample No. : 1
Manufacturer :


Date : 2022-10-17 16:18:08
Sam. Status :
Instrument : HAAS-2000(EVERFINE)
Test by : ADMIN
Assessor : admin

Test Condition

Temperature : 85Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 52351 (80%)
T : 445 ms
Sensitivity : High

Spectrum

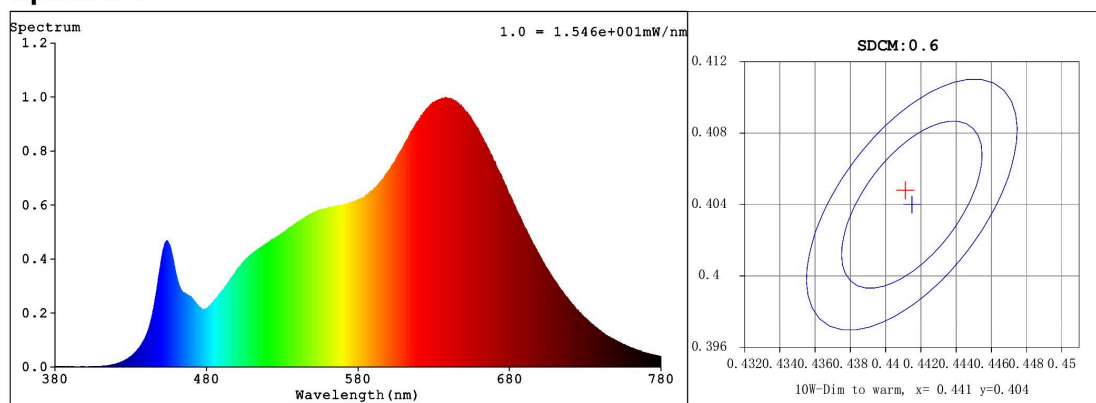

Colorimetric Parameters

Chromaticity Coordinate: x = 0.4406 y = 0.4048 / u' = 0.2526 v' = 0.5222 (duv=-2.00e-04) Dx,Dy:-0.0003,-0.0006

CCT= 2945K Prcp WL: Ld=583.1nm Purity=53.8%

Peak WL: Lp=637nm FWHM: =161.1nm Ratio:R=25.8% G=71.1% B=3.1%

Render Index: Ra = 96.7 AvgR = 95.5 TM30:Rf=95 Rg=102

R1 =96 R2 =99 R3 =96 R4 =96 R5 =96 R6 =97 R7 =99

R8 =96 R9 =93 R10=99 R11=93 R12=86 R13=96 R14=96 R15=96

LEVEL:OUT WHITE:ANSI_3000K

CQS Parameters: Qa = 97.8 GAI Parameters: GAI_EES = 57.5, GAI_BB8:102.9, GAI_BB15:107.3 TLCl Parameters
COI:5.33

Photometric & Radiometric Parameters

Flux = 738.06 lm Eff. : 80.32 lm/W Fe = 2.8411 W

Scotopic:1079.7 S/P:1.4628 (EQE):3005.4%

Flux of emitted photons(umol/s):14.285 Fluo. and blue light ratio:12.47 Fluorescent eff.:273.2

B: 2.5828e+003mW

Electrical parameters

V = 231.0 V I = 0.04168 A P = 9.189 W PF = 0.9544

Kdisp(IEC) = 0.9732 Freq=49.99 Hz


GBT5702

Gamut Index: Ga=1.0

C1 =102 C2 =90 C3 =81 C4 =100 C5 =102 C6 =89 C7 =83

C8 =100 C9 =101 C10=85 C11=102 C12=86 C13=100 C14=87 C15=102

Model placed on the Union market from 01/09/2022



EPREL registration number: 1392067

<https://eprel.ec.europa.eu/qr/1392067>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: customer service

Website: www.namron.com

Email: post@namron.com

Phone: 22 81 27 70

Address:

Nedre kalbakkvei 88B
1081 Oslo
Norway