## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE

Model identifier: 28117-30-31

Type of light source:					
Lighting technology used:	LED	Non-directional or directional:	NDLS		
Light source cap-type	Integrated LED				
(or other electric interface)	ceiling light				
Mains or non-mains:	NMLS	Connected light	No		
		source (CLS):			
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	Yes		
Product parameters					
Parameter	Value	Parameter	Value		
General product parameters:					
Energy consumption in on-	30	Energy efficiency	G		
mode (kWh/1000 h), rounded		class			


mode (kwii) 1000 iij, Todiided		Class		
up to the nearest integer				
Useful luminous flux (фuse), in-	2 200 in Wide	Correlated	colour	3 000
dicating if it refers to the flux in	cone (120°)	temperature	,	

a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	come (120 )	rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	
On-mode power (P <sub>on</sub> ), expressed in W	30,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec-	0,00

On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	30,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80
Outer dimen-	Height	39	Spectral power dis-	See image
sions without	Width	310	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	310	range 250 nm to 800 nm, at full-load	
				D 1

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,434
		nates (x and y)	0,403
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,96		

(a)'-': not applicable; (b)'-': not applicable;

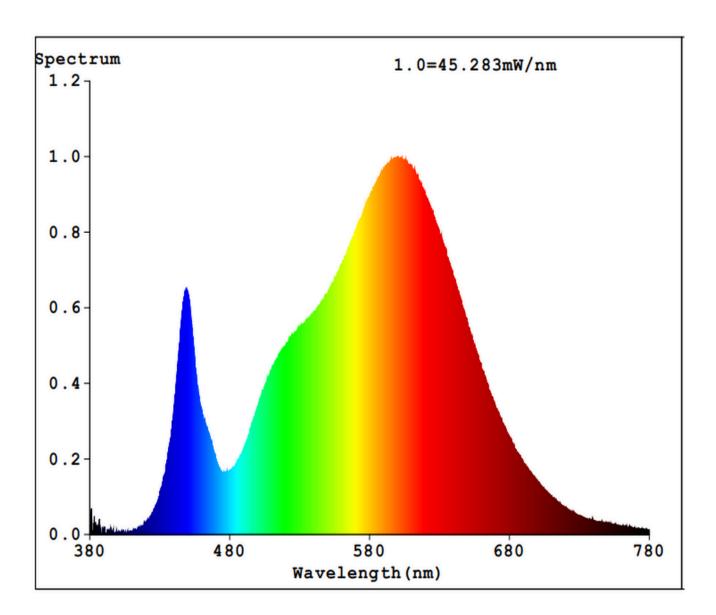

## Model placed on the Union market from 09/10/2019



**EPREL registration number:** 833723 https://eprel.ec.europa.eu/qr/833723

Supplier: Lucide (Manufacturer) Website: www.lucide.be

**Customer care service:** 

Name: Lucide NV Website:

Email: info@lucide.com Phone: +32 3 366 22 04

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium