

S200M, MCB 10KA. 0.5 TO 63A, 1 TO 4 POLES, B OR C OR D OR K OR Z CURVE

Product Environmental Profile

Environmental Product Declaration



Document in compliance with ISO 14025: 2010 "Environmental labels and declarations. Type III environmental declarations"

ORGANIZATION		CONTACT INFORMATION	
ABB STOTZ-KONTAKT GmbH		Sanjay K Gupta: sanjayk.gupta@in.abb.com; Rupert Dehe: rupert.dehe@de.abb.com	
ADDRESS OF THE ASSEMBLY SITE		WEBSITE	
Eppelheimer Str. 82, 69123 HEIDELBERG		www.abb.de/stotz-kontakt	
STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	1/15



ABB Purpose & Embedding Sustainability

ABB is committed to continually promoting and embedding sustainability across its operations and value chain, aspiring to become a role model for others to follow. With its ABB Purpose, ABB is focusing on reducing harmful emissions, preserving natural resources and championing ethical and humane behavior.

This study is related to ABB STOTZ-KONTAKT GmbH, Heidelberg plant that produces MCBs in different ranges. The plant already has the following certifications besides product standard certifications:

DIN EN ISO 9001,
DIN EN ISO 14001,
DIN ISO 45001,
DIN EN ISO 50001 and
ISO/TS 22163




General Information

Reference product	S201M-C16 Miniature Circuit Breaker - 1P - C - 16 A
Description of the product	S201M-C16 Miniature Circuit Breaker (MCB), 1 Pole, 16A, C Curve, 10kA All MCBs in the product range S200M comply with IEC/EN 60898-1, IEC/EN 60947-2, UL1077, CSA 22.2 No. 235 allowing their use in residential, commercial, and industrial applications.
Functional unit	Protect during 20 years the installation against overloads and short circuits in circuit with assigned voltage 230/400 V AC and current 16A. This protection is ensured in accordance with the following parameters; - Number of pole: 1 - Rated Breaking capacity: 10kA - Tripping Curve: C
Other products covered	It is a "Product family declaration" which covers Miniature Circuit Breaker (MCB) S200M Product Series with Standard Product Characteristics Rated current In; 0.5A to 63A, Rated Voltage U; 230/400 V AC Pole combination Np; 1 to 4 Pole included 1Pole+ N & 3Pole + N, Rated Breaking Capacity: Icn; 10kA Tripping Curve Cd: B,C,D,K & Z

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	2/15

© Copyright 2022 ABB. All rights reserved.

Constituent materials

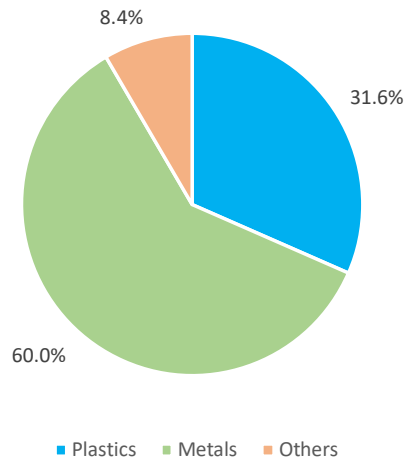

Total weight of Reference product	127.86 gram including packaging material
--	--

Plastics			Metals			Others		
Name	Weight g	Weight %	Name	Weight g	Weight %	Name	Weight g	Weight g
PA66	37.51	29.4	Steel	62.60	48.9	Corrugated board	10.68	8.3
POM	1.71	1.3	Copper	10.05	7.9	Miscellaneous Other Material	0.12	0.1
Miscellaneous Plastics	1.12	0.9	Aluminium	2.82	2.2			
			Miscellaneous Metals	1.25	1.0			

These products comply with actual requirements of EU Directives 2011/65/EU of 8 June 2011 (ROHS) materials and do not contain or or only contain in the authorised proportions lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls -PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive.

Manufacturing, distribution, installation, use, and end-of-life (EOL) stages are taken into account in the environmental impact analysis of this study.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	3/15



Additional Environmental Information

Manufacturing	Packaging material used in the product is compliant with applicable regulations. Its estimated recyclability rate is 98% (in % of packaging weight) at the end of life.
Distribution	Is modelled by considering the average distances from manufacturing site to distance at delivery point.
Installation	Does not required any special process. Packaging waste generated as output in installation phase.
Use	MCB is Maintenance free and does not need any special process while in use.
End of life	The recyclability rate of the Reference Product is estimated at 94.5%. The calculation of this weight is based on the method IEC/TR 62635



Environmental impacts


Reference lifetime	20 Years
Product category	Circuit Breakers
Installation elements	End of life of MCB packaging considered in Installation phase.
Use scenario	At loading rate 50% of rated current & use time rate 30% of reference lifetime total energy consumption is 32.9 kWh
Geographical representativeness	Global
Technological representativeness	MCB offer protection to the domestic and industrial installation from overload & short circuit faults.
Software and database used	SimaPro 9.4.0.2 and Data base Ecoinvent 3.8

Energy model used

Manufacturing	Electricity Medium Voltage, Germany
Installation	Electricity High Voltage & Low Voltage, mix of Global
Use	Electricity Medium Voltage, mix of Global
End of life	Electricity High Voltage & Low Voltage, mix of Global

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	4/15

Common base of mandatory indicators

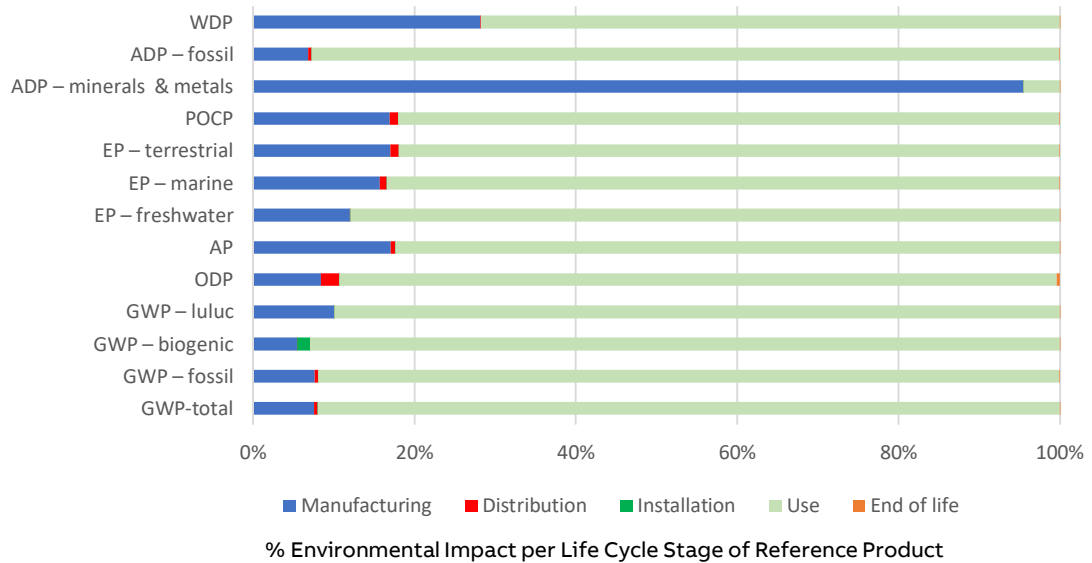

Environmental impact indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
GWP-total	kg CO ₂ eq.	1.966E+01	1.484E+00	8.519E-02	1.158E-02	1.807E+01	1.287E-02
GWP-fossil	kg CO ₂ eq.	1.896E+01	1.444E+00	8.515E-02	1.068E-03	1.741E+01	1.284E-02
GWP-biogenic	kg CO ₂ eq.	6.790E-01	3.714E-02	3.563E-05	1.051E-02	6.313E-01	2.003E-05
GWP-luluc	kg CO ₂ eq.	2.605E-02	2.614E-03	1.052E-05	5.124E-07	2.342E-02	5.834E-06
GWP-fossil = Global Warming Potential fossil fuels GWP-biogenic = Global Warming Potential biogenic GWP-luluc = Global Warming Potential land use and land use change							
OPD	kg CFC-11 eq.	8.660E-07	7.295E-08	1.949E-08	2.444E-10	7.702E-07	3.115E-09
OPD = Depletion potential of the stratospheric ozone layer							
AP	H+ eq.	7.874E-02	1.344E-02	4.160E-04	4.315E-06	6.483E-02	4.884E-05
AP = Acidification potential, Accumulated Exceedance							
EP-freshwater	kg P eq.	1.510E-02	1.812E-03	2.130E-06	9.964E-08	1.329E-02	1.257E-06
EP-marine	kg N eq.	1.577E-02	2.471E-03	1.435E-04	8.939E-06	1.313E-02	1.229E-05
EP-terrestrial	mol N eq.	1.455E-01	2.468E-02	1.571E-03	1.011E-05	1.191E-01	1.340E-04
EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment EP-terrestrial = Eutrophication potential, Accumulated Exceedance							
POCP	kg NMVOC eq.	3.904E-02	6.604E-03	4.243E-04	6.092E-06	3.195E-02	4.772E-05
POCP = Formation potential of tropo-spheric ozone							
ADP-minerals & metals	kg Sb eq.	7.081E-04	6.759E-04	5.706E-08	2.653E-09	3.210E-05	3.174E-08
ADP-fossil	MJ	2.867E+02	1.959E+01	1.225E+00	1.716E-02	2.657E+02	2.151E-01
ADP-minerals & metals = Abiotic depletion potential for non-fossil resources ADP-fossil = Abiotic depletion for fossil resources potential							
WDP	m ³ e depr.	3.213E+00	9.042E-01	1.664E-03	1.145E-04	2.305E+00	2.081E-03
WDP = Water Deprivation potential							

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	5/15

Common base of mandatory indicators

Inventory flows indicator – Resource use indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
PERE	MJ	3.712E+01	2.602E+00	5.982E-03	2.604E-04	3.451E+01	2.570E-03
PERM	MJ	1.586E-01	1.586E-01	0.000E+00	0.000E+00	0.000E+00	0.000E+00
PERT	MJ	3.728E+01	2.761E+00	5.982E-03	2.604E-04	3.451E+01	2.570E-03
PENRE	MJ	2.852E+02	1.810E+01	1.225E+00	1.716E-02	2.656E+02	2.151E-01
PENRM	MJ	1.494E+00	1.494E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
PENRT	MJ	2.867E+02	1.959E+01	1.225E+00	1.716E-02	2.656E+02	2.151E-01

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials
 PERM = Use of renewable primary energy resources used as raw materials
 PERT = Total Use of renewable primary energy resources
 PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials
 PENRM = Use of non-renewable primary energy resources used as raw materials
 PENRT = Total Use of non-renewable primary energy re-sources)

Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy re-sources

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
SM	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
RSF	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
NRSF	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
FW	m ³	1.608E-01	2.519E-02	6.092E-05	3.434E-06	1.355E-01	5.644E-05

SM = Use of secondary material
 RSF = Use of renewable secondary fuels
 NRSF = Use of non-renewable secondary fuels
 FW = Use of net fresh water

Inventory flows indicator – Waste category indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
Hazardous waste disposed	kg	5.667E-04	4.089E-04	3.204E-06	4.010E-08	1.540E-04	4.999E-07
Non- hazardous waste disposed	kg	1.250E+00	2.445E-01	2.475E-02	5.921E-03	8.293E-01	1.451E-01
Radioactive waste disposed	kg	9.997E-04	5.883E-05	8.564E-06	1.108E-07	9.308E-04	1.403E-06

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	6/15

Common base of mandatory indicators

Inventory flows indicator – Output flow indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
Components for re-use	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Materials for recycling	kg	1.626E-02	9.930E-03	0.000E+00	6.332E-03	0.000E+00	0.000E+00
Materials for energy recovery	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Exported energy	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00

Inventory flow indicator – other indicators

Indicator	Unit	Total
Biogenic carbon content of the product	kg of C	0.000E+00
Biogenic carbon content of the associated packaging	kg of C	5.321E-03

Optional indicators

Environmental indicators

Indicator	Unit	Total	Manu- facturing	Distri- bution	Instal- lation	Use	End of life
Total use of primary energy during the life cycle	MJ	3.240E+02	2.236E+01	1.231E+00	1.742E-02	3.001E+02	2.177E-01
Emissions of fine particles	incidence of diseases	2.973E-07	8.440E-08	2.549E-09	1.211E-10	2.086E-07	1.536E-09
Ionizing radiation, human health	kBq U235 eq.	3.568E+00	1.581E-01	5.543E-03	8.404E-05	3.403E+00	1.012E-03
Ecotoxicity (fresh water)	CTUe	3.059E+02	1.610E+02	7.334E-01	3.403E-02	1.440E+02	1.762E-01
Human toxicity, carcinogenic effects	CTUh	7.189E-09	4.090E-09	1.203E-11	4.206E-13	3.082E-09	4.912E-12
Human toxicity, non-carcinogenic effects	CTUh	2.160E-07	1.099E-07	1.062E-09	2.909E-11	1.049E-07	1.678E-10
Impact related to land use/soil quality	kg	1.478E+01	2.218E+00	2.492E-01	5.565E-03	1.223E+01	7.742E-02

Extrapolation of Coefficients

Extrapolation rules are established according to EN 50693. Results of LCA performed for a reference product extrapolated to other products, these products are belonged to a same homogeneous product family as the reference product. The group of products have the following same characteristics:

- Same main function, Same product standards,
 - Similar manufacturing technology: same type of materials and manufacturing processes
- Coefficients factors has been extrapolated with division of environment indicators value of homogeneous product by reference product environment indicator value.

For other products than the Reference product covered by this PEP, the environmental impacts for each phase of the lifecycle are obtained by multiplying the values of the Reference product by the following coefficients:

Note: If the coefficient is "1", the impacts of the phase of the life cycle are assimilated to the Reference product, meaning that the impacts are unchanged in comparison to the Reference product.

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	8/15

Manufacturing phase: To calculate environmental impact of covered product nominal value of reference product environment category to be multiplied with corresponding rating Impact category's coefficient, then value to be multiplied by the number of poles.

i.e. $y=a*x*n$

Where a= Coefficient of corresponding rating impact category

y= Homogeneous product environmental category

x=Nominal value of reference product environmental category

n=Number of poles including neutral poles

Impact category	Manufacturing Phase Coefficient					Rated Current				
	0.5A, 1A, 1.6A, 2A, 3A & 4A	6A, 8A & 10A	13A, 15A & 16A	20A, 25A, 32A & 40A	50A & 63A					
GWP-total	0.985	1.000	1.000	1.034	1.068					
GWP-fossil	0.985	1.000	1.000	1.034	1.068					
GWP-biogenic	0.985	0.997	1.000	1.026	1.071					
GWP-luluc	0.958	0.994	1.000	1.079	1.163					
OPD	0.976	0.993	1.000	1.057	1.112					
AP	0.894	0.945	1.000	1.351	1.610					
EP-freshwater	0.952	0.978	1.000	1.141	1.253					
EP-marine	0.972	0.990	1.000	1.074	1.134					
EP-terrestrial	0.966	0.986	1.000	1.099	1.180					
POCP	0.964	0.985	1.000	1.109	1.200					
ADP-minerals & metals	0.943	0.969	1.000	1.182	1.320					
ADP-fossil	0.981	0.998	1.000	1.040	1.076					
WDP	0.908	0.950	1.000	1.310	1.527					
Inventory flows indicator – Resource use indicators										
PERE	0.905	0.955	1.000	1.299	1.529					
PERM	1.067	1.000	1.000	1.000	1.000					
PERT	0.914	0.958	1.000	1.282	1.499					
STATUS										
Approved	SECURITY LEVEL Public		REGISTRATION NUMBER PEP ecopassport® ABBG-00100-V01.01-EN		PAGE 9/15					

Impact category	0.5A, 1A, 1.6A, 2A, 3A & 4A	6A, 8A & 10A	13A, 15A & 16A	20A, 25A, 32A & 40A	50A & 63A
PENRE	0.979	0.998	1.000	1.042	1.083
PENRM	1.011	0.997	1.000	1.009	0.991
PENRT	0.981	0.998	1.000	1.040	1.076
Inventory flows indicator – Indicators describing the use of secondary materials, water, and energy re-sources					
FW	0.921	0.958	1.000	1.258	1.443
Inventory flows indicator – Waste category indicators					
Hazardous waste disposed	0.890	0.934	1.000	1.315	1.555
Non- hazardous waste disposed	0.971	0.974	1.000	1.188	1.336
Radioactive waste disposed	0.959	0.989	1.000	1.089	1.168
Inventory flows indicator – Output flow indicators					
Materials for recycling	1.000	0.997	1.000	1.006	0.979
Inventory flows indicator – Other indicators					
Biogenic carbon content of the associated packaging	1.000	1.000	1.000	1.000	1.000

Note:

In above table coefficients are excluded when impact indicators value is zero for reference products. And for Optional Environmental indicators.

Distribution, Installation & EOL Phase: To calculate the environmental impact of covered product nominal value of reference product environment category to be multiplied with corresponding rating's coefficient, and then value to be multiplied by the number of poles. i.e. $y=a*x*n$

Where a= Coefficient of corresponding rating

y= Homogeneous product environmental category

x=Nominal value of reference product environmental category,

n=Number of poles including neutral poles

Coefficient of Distribution, Installation & EOL Phase

Rated Current	0.5A, 1A, 1.6A, 2A, 3A & 4A	6A, 8A & 10A	13A,15A & 16A	20A, 25A, 32A & 40A	50A & 63A
Distribution Phase	1.001	1.000	1.000	1.032	1.071
Installation Phase	1.000	1.000	1.000	1.000	1.000
EOL Phase	1.001	0.999	1.000	1.029	1.073

Use phase: To calculate the environmental impact of covered product nominal value of reference product environment category to be multiplied with corresponding rating w.r.t tripping curve's coefficient, and then value to be multiplied by the number of poles. i.e. $y=a*x*n$

Where a= Coefficient of corresponding rating w.r.t tripping curve

y= Homogeneous product environmental category

x=Nominal value of reference product environmental category.

n=Number of poles including neutral poles

Use Phase Coefficient

Tripping curve	Rated Current										
	0.5A	1A	1.6A	2A	3A	4A	6A	8A	10A	13A	15A
B	0.560	0.560	0.640	0.720	0.520	0.720	0.800	0.600	0.840	0.920	
C	0.560	0.560	0.640	0.720	0.520	0.720	0.800	0.600	0.840	0.920	
D	0.440	0.500	0.600	0.660	0.480	0.680	0.760	0.600	0.640	0.880	
K	0.440	0.500	0.600	0.660	0.480	0.680	0.760	0.600	0.560	0.560	0.680
Z	0.960	0.920	1.120	1.000	0.960	0.960	1.280	0.800	1.080	-	-

Use Phase Coefficient

Tripping curve	Rated Current						
	16A	20A	25A	32A	40A	50A	63A
B	1.000	1.000	1.280	1.480	1.920	1.300	1.920
C	1.000	1.000	1.280	1.480	1.920	1.300	1.920
D	1.000	0.920	1.240	1.440	1.680	1.160	1.920
K	0.800	1.080	1.160	1.440	1.800	1.240	1.760
Z	1.120	0.960	1.320	1.440	1.640	1.640	2.080

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	11/15

Environmental Impact Indicator Glossary

Impact indicators

Indicator	Description	Unit
Global warming potential (GWP) - total	Indicator of potential global warming caused by emissions to air contributing to the greenhouse effect. The total global warming potential (GWP-total) is the sum of three sub-categories of climate change. GWP-total = GWP-fossil + GWP-biogenic + GWP- land use and land use change	kg CO ₂ eq.
Ozone depletion (OD)	Emissions to air that contribute to the destruction of the stratospheric ozone layer	kg CFC-11 eq.
Acidification of soil and water (A)	Acidification of soils and water caused by the release of certain gases to the atmosphere, such as nitrogen oxides and sulphur oxides	H+ eq.
Eutrophication (E)	Indicator of the contribution to eutrophication of water by the enrichment of the aquatic ecosystem with nutritional elements, e.g. industrial or domestic effluents, agriculture, etc. This indicator is divided to three: freshwater, marine and terrestrial.	kg P eq., kg N eq., mole N eq.
Photochemical ozone creation (POCP)	Indicator of emissions of gases that affect the creation of photochemical ozone in the lower atmosphere (smog) because of the rays of the sun.	kg NMVOC eq.
Depletion of abiotic resources – elements (ADPe)	Indicator of the depletion of natural non-fossil resources	kg Sb eq.
Depletion of abiotic resources – fossil fuels (ADPf)	The use of non-renewable fossil resources in an unsustainable way (e.g. from material to waste)	MJ (lower heating value)
Water Deprivation potential (WDP)	Deprivation-weighted water consumption. Assesses the potential of water deprivation, to either humans or ecosystems, building on the assumption that the less water remaining available per area, the more likely another user will be deprived.	m ³ e depr.

Resource use indicators

Indicator	Description	Unit
Total use of primary energy	Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) + Total use of renewable primary energy re-sources (primary energy and primary energy resources used as raw materials)	MJ (lower heating value)

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	12/15

Environmental Impact Indicator Glossary

Inventory flows indicator -Indicators describing the use of secondary materials, water, and

Indicator	Description	Unit
SM = Use of secondary material	Material recovered from previous use by recycling or from waste which substitutes primary materials and use in product.	kg
RSF = Use of renewable secondary fuels	Fuel recovered after a first use or retrieved from waste of renewable fuel, that replaces primary fuels.	MJ
NRSF = Use of non-renewable secondary fuels	Fuel recovered after a first use or retrieved from waste of non-renewable fuel, that replaces primary fuels.	MJ
FW = Use of net fresh water	Freshwater use in absolute values	m ³

Inventory flows indicator – Waste category indicators

Indicator	Description	Unit
Hazardous waste disposed	A hazardous waste is a special type of waste because it cannot be disposed of by common means like other by-products of our everyday lives.	Kg
Non- hazardous waste disposed	Non-hazardous waste is any waste that does not cause harm to people or the environment.	Kg
Radioactive waste disposed	Radioactive waste is a type of hazardous waste that contains radioactive material.	Kg

Inventory flows indicator – Output flow indicators

Indicator	Description	Unit
Components for reuse	Material or components leaving the modelled system boundary which is destined for reuse	Kg
Materials for recycling	Material leaving the modelled system boundary which is destined for recycling	Kg
Materials for energy recovery	Material leaving the modelled system boundary which is destined for use in power stations using secondary fuels.	Kg
Exported energy	Energy exported from waste incineration and landfill	MJ

Inventory flow indicator – other indicators

Indicator	Description	Unit
Biogenic carbon content of the product, and Biogenic carbon content of the associated packaging	Biogenic carbon is the carbon that is stored in biological materials, such as plants or soil.	kg of C

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	13/15

Environmental Impact Indicator Glossary

Inventory flow indicator – other indicators

Indicator	Description	Unit
Total use of primary energy during the life cycle	Sum of the primary renewable and non-renewable energy	MJ
Emissions of fine particles	Indicator of the potential incidence of disease due to particulate matter emissions.	incidence of diseases
Ionizing radiation, human health	Damage to human health and ecosystems linked to the emissions of radionuclides.	kBq U235 eq.
Ecotoxicity (fresh water)	Impact on freshwater organisms of toxic substances emitted to the environment.	CTUe
Human toxicity, carcinogenic effects and non-carcinogenic effects	Impact on humans of toxic substances emitted to the environment. Divided into non-cancer and cancer related toxic substances.	CTUh
Impact related to land use/soil quality	Measure of the changes in soil quality (Biotic production, Erosion resistance, Mechanical filtration).	kg

References

- Product Category Rules for Electrical, Electronic and HVAC-R Products - PEP-PCR-ed4-EN-2021 09 06
- SPECIFIC RULES FOR Electrical switchgear and control gear Solutions - PSR-0005-ed2-EN-2016 03 29
- IEC 60947-1 - Low-voltage switchgear and controlgear - Part 1: General rules
- IEC 60947-2 - Low-voltage switchgear and controlgear - Part 2: Circuit-breakers
- ISO 14067:2018 Greenhouse gases — Carbon footprint of products — requirements and guidelines for quantification
- ISO 14044 Environmental management — Life cycle assessment — Requirements and guidelines
- ISO14040 Environmental management — Life cycle assessment — Principles and framework
- ISO 14025 - Environmental management — Life cycle assessment — Principles and framework
- IEC/TR 62635 Guidelines for end-of-life information provided by manufacturers and recyclers and for recyclability rate calculation of electrical and electronic equipment
- IEC 62474 Material declaration for products of and for the electrotechnical industry
- EN 50693:2019 – Product category rules for life cycle assessments of electronic and electrical products and systems

STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	14/15

Registration number:	ABBG-00100-V01.01-EN	Drafting Rules:	PCR-ed4-EN-2021 09 06
Verifier accreditation number:	VH42	Supplemented by:	PSR-0005-ed2-EN-2016 03 29
Date of issue:	12.2022	Information and reference documents:	www.pep-ecopassport.org
		Validity period:	5 years


Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal External

The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)

PEP are compliant with XP C08-100-1: 2016
The elements of the present PEP cannot be compared with elements from another program

Document in compliance with ISO 14025: 2010 "Environmental labels and declarations. Type III environmental declarations"



STATUS	SECURITY LEVEL	REGISTRATION NUMBER	PAGE
Approved	Public	PEP ecopassport® ABBG-00100-V01.01-EN	15/15