

ALFA REFLEKTOR WARMDIM

220-240V~50/60Hz LED 10W 220mA IP44










Downlighten kan dimmes ned helt flimmerfritt.
Lav høyde. Ekstern driver med hurtigkobling for raskere og enklere installasjon. Dimbar med faseavsnitt dimmer. Kan monteres direkte i isolasjonsmatter. Enkel installering. Monteres uten verktøy.


The downlight is dimmable all the way down completely flicker-free.
Low altitude. External driver with quick connector for faster and easier installation. Dimmable with trailing edge dimmer. Can be mounted direct into insulation sheet. Easy installation. Mounting without tools.

Total Effekt:	10W
LED effekt:	8,3W
Lumen chip:	770lm
Lumen downlight:	680lm
Effektivitet:	68lm/W
Ra:	95+
R9:	≥90
SDCM:	≤3
LED Chip:	Bridgelux
Fargetemperatur:	2800-2000K (med dimming)
Lysspredning:	35° Tilt: 30°
Tetthetsgrad:	IP44
Levetid:	50.000 timer L90B10
	80.000 timer L80B50
	120.000 timer L70B50


Total Power:	10W
LED power:	8.3W
Lumen chip:	770lm
Lumen downlight:	680lm
Efficacy:	68lm/W
Ra:	95+
R9:	≥90
SDCM:	≤3
LED Chip:	Bridgelux
Colour Temperature:	2800-2000K (with dimming)
Beam Angle:	35° Tilt: 30°
IP Rating:	IP44
Lifetime:	50,000 hours L90B10
	80,000 hours L80B50
	120,000 hours L70B50

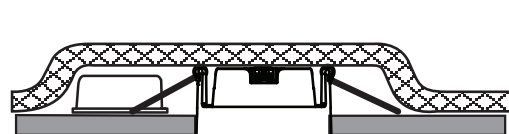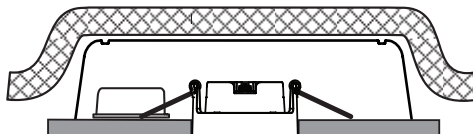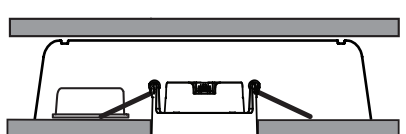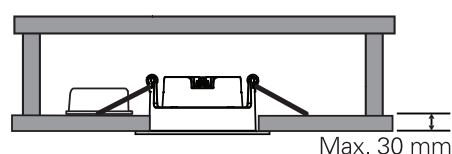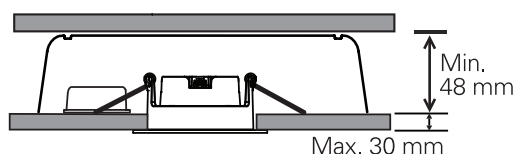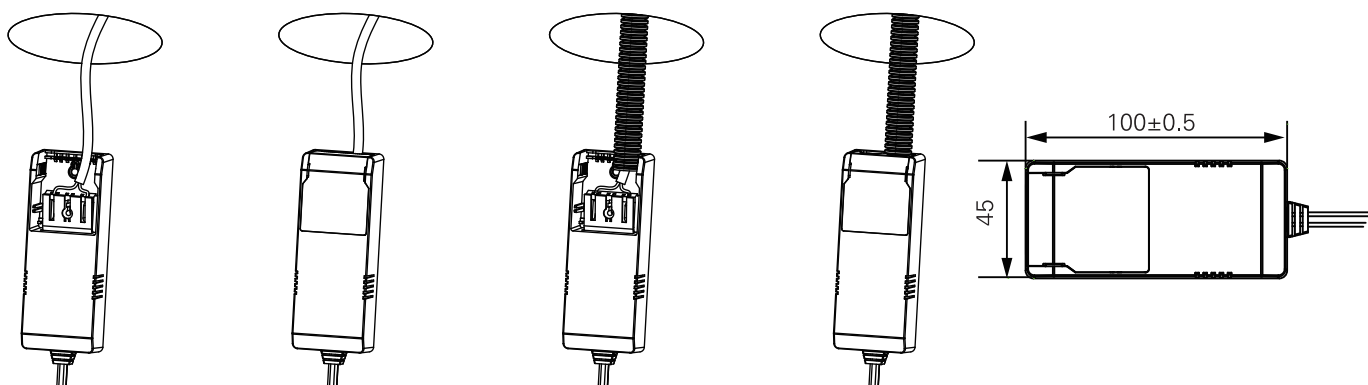

MÅL / MEASURES

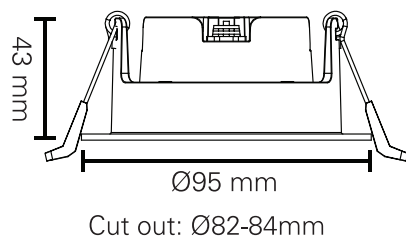

Minimumsavstand til brennbart materiale i armaturens stråleretning. /
Minimum distance to flammable material in the beam direction



Må installeres av registrert elektroforetak.
Must be installed by registered electrical company.

Dette produktet inneholder en lyskilde i energieffektivitetsklasse: se tabell eller merkelapp.
This product contains a light source of energy efficiency class: see table or label.

El-nr	Produkt	Effekt(W)	energieffektivitetsklasse forlys
3220263	ALFA REFLEKTOR WARMDIM 10W MATT HVIT	10	F
3220265	ALFA REFLEKTOR WARMDIM 10W MATT SORT	10	F

Max. luminaires per circuit breaker:

Type B			Type C		
10A	16A	20A	10A	16A	20A
115	184	230	127	204	255