

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Namron

Supplier's address: customer service, Nedre kalbakkvei 88B, 1081 Oslo, NO

Model identifier: 3220263

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	670 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2000...2800
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	10	
		Chromaticity coordinates (x and y)	0,440 0,402	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 184	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	93	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,1	

(a) '-': not applicable;

(b) '-': not applicable;


Spectrum Test Report

Sample	:	Date	: 2022-10-17 17:22:59
Specification	: 3220263	Sam. Status	:
Sample No.	: 1	Instrument	: HAAS-2000(EVERFINE)
Manufacturer	:	Test by	: ADMIN
		Assessor	: admin

Test Condition

Temperature	: 85Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52099 (79%)
Test Mode	: Fast Test	T	: 445 ms
		Sensitivity	: High

Spectrum

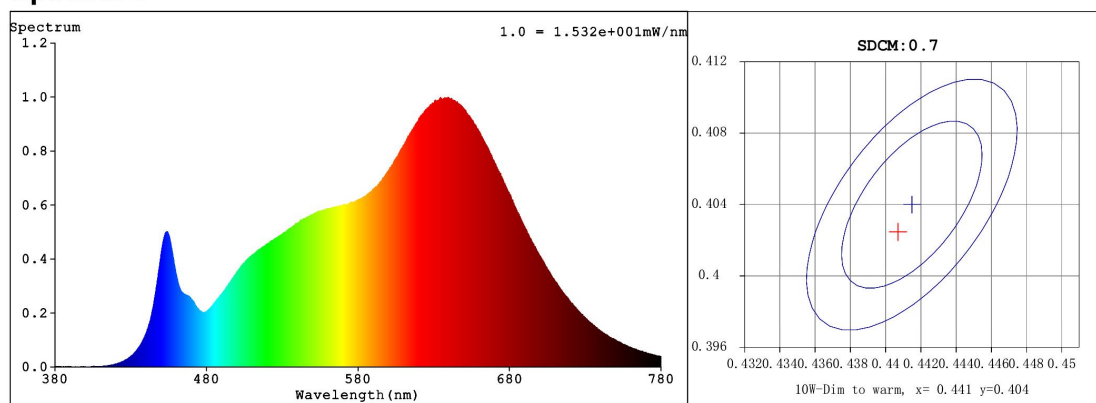

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4402$ $y = 0.4025$ / $u' = 0.2534$ $v' = 0.5212$ ($duv = -1.08e-03$) $Dx, Dy: -0.0016, -0.0033$
CCT= 2932K Prcp WL: $L_d = 583.5nm$ Purity=52.9%
Peak WL: $L_p = 639nm$ FWHM: $=160.4nm$ Ratio: R=26.0% G=71.0% B=3.1%
Render Index: $R_a = 96.7$ AvgR = 95.5 TM30: Rf=96 Rg=103
R1 =96 R2 =98 R3 =96 R4 =96 R5 =96 R6 =97 R7 =99
R8 =96 R9 =93 R10=99 R11=93 R12=86 R13=96 R14=96 R15=96
LEVEL:OUT WHITE:ANSI_3000K
CQS Parameters: $Q_a = 97.7$ GAI Parameters: $GAI_EES = 59.0$, $GAI_BB8:106.3$, $GAI_BB15:110.4$ TLCl Parameters
COI:5.42

Photometric & Radiometric Parameters

Flux = 715.99 lm Eff. : 79.56 lm/W $Fe = 2.7631 W$
Scotopic:1043.6 S/P:1.4575 (EQE):3036.6%
Flux of emitted photons($\mu mol/s$):13.893 Fluo. and blue light ratio:12.13 Fluorescent eff.:270.5
B: $2.5585e+003mW$


Electrical parameters

$V = 230.9 V$ $I = 0.04086 A$ $P = 8.999 W$ PF = 0.9536
 $K_{disp}(IEC) = 0.9724$ Freq=49.99 Hz

GBT5702

Gamut Index: $G_a = 1.0$
C1 =101 C2 =91 C3 =84 C4 =101 C5 =102 C6 =89 C7 =81
C8 =99 C9 =101 C10=86 C11=103 C12=86 C13=100 C14=90 C15=101

Model placed on the Union market from 01/09/2022



EPREL registration number: 1392021

<https://eprel.ec.europa.eu/qr/1392021>

Supplier: NAMRON AS (Importer)

Website: www.namron.com

Customer care service:

Name: customer service

Website: www.namron.com

Email: post@namron.com

Phone: 22 81 27 70

Address:

Nedre kalbakkvei 88B
1081 Oslo
Norway