

## HCI-TC 70 W/930 WDL PB Shoplight

POWERBALL HCI-TC Shoplight | Metal halide lamps with ceramic technology for enclosed luminaires



### Areas of application

- Shop interiors, shop windows
- Museums, exhibitions
- Accent lighting
- Decorative lighting
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

### Product benefits

- Excellent color rendering
- Excellent rendering of red tones
- Very good color stability
- High efficiency
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter

### Product features

- POWERBALL ceramic technology
- Light color: warm white (930 WDL)
- Average lifetime: 15,000 h (operation with ECG with 70...400 Hz square-wave current)
- Average lifetime: 12,000 h (with magnetic control gear)
- Color rendering index  $R_a \geq 93$



## Technical data

### Electrical data

Nominal wattage	70.00 W
Rated wattage	73.00 W
Lamp current	0.97 A
PFC capacitor at 50 Hz	12 $\mu$ F <sup>1)</sup>
Ignition voltage	3.6 / 5.0 kVp <sup>2)</sup>

<sup>1)</sup> At rated voltage and  $\cos \varphi \geq 0.9$

<sup>2)</sup> Minimum; for superimposed ignition with square wave electronic ballast 3.0 kVp are sufficient / Maximum; this limit is for safety reasons


### Photometrical data

Luminous flux	6800 lm <sup>1)</sup>
Luminous efficacy	93 lm/W <sup>2)</sup>
Color rendering index Ra	94
Color temperature	3000 K
Light color	930
Rated LLMF at 2,000 h	0.82
Rated LLMF at 4,000 h	0.79
Rated LLMF at 6,000 h	0.78
Rated LLMF at 8,000 h	0.74
Rated LLMF at 12,000 h	0.60
UV protection	Yes

<sup>1)</sup> In operation with electronic control gear with 70...400 Hz square-wave current. Operation with magnetic ballast can be less efficient

<sup>2)</sup> In operation with low frequency square wave electronic ballast, 70...400 Hz. Operation with electromagnetic ballast may be less efficient.

### Dimensions & weight



Diameter	15.0 mm
Length	81.0 mm
Light center length (LCL)	52.0 mm

## Product datasheet

Product weight	9.00 g
----------------	--------

### Temperatures & operating conditions

Maximum permitted outer bulb temperature	550 °C
Maximum permitted pinch temperature	350 °C

### Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.98
Rated lamp survival factor at 6,000 h	0.97
Rated lamp survival factor at 8,000 h	0.96
Rated lamp survival factor at 12,000 h	0.80
Lifespan B50	15000 h <sup>1)</sup>
Operation mode LLMF/LSF	ECG

<sup>1)</sup> At ECG

### Additional product data

Base (standard designation)	G8.5
System guarantee level	3 (2/5)
Mercury content	8.3 mg <sup>1)</sup>

<sup>1)</sup> Maximum

### Capabilities

Dimmable	Yes <sup>1)</sup>
Burning position	Any
Enclosed luminaire required	Yes

<sup>1)</sup> In combination with POWERTRONIC PTo

### Certificates & standards


Energy efficiency class	A+
Energy consumption	81 kWh/1000h

### Country specific categorizations

ILCOS	MT/UB-70/930-H/SL-G8.5-17/85
-------	------------------------------

### Light Distribution

---

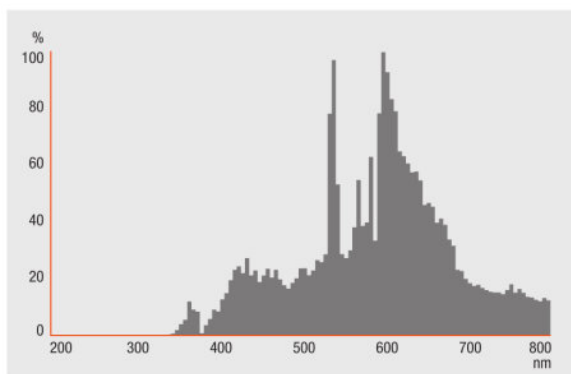

---

### Spectral power distribution

---

### System guarantee


For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.




---

### Guarantee


Product datasheet




Circuit diagram



Circuit diagram

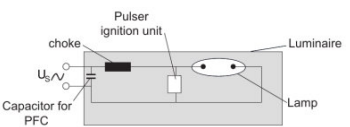

Circuit diagram



Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321681812	HCI-TC 70 W/930 WDL PB Shoplight	Shipping carton box 12	180 mm x 127 mm x 140 mm	3.20 dm <sup>3</sup>	363.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit  
▶ [www.osram.com/system-guarantee](http://www.osram.com/system-guarantee)

Disclaimer

## Product datasheet

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

---

## HCI-TC 70 W/930 WDL PB Shoplight

POWERBALL HCI-TC Shoplight | Metal halide lamps with ceramic technology for enclosed luminaires

Product name	Product name ECG	EAN
HCI-TC 70 W/930 WDL PB Shoplight	PT-FIT 70/220-240 I	4008321377685
	PT-FIT 70/220-240 S	4008321386649
	PTi 70/220-240 I	4008321099501
	PTi 70/220-240 S	4008321049629