

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Shelly

**Supplier's address:** Allterco, Cherni Vrh Boulevard 103, 1407 Sofia, BG

**Model identifier:** 3800235262092

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	7,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	115	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	100
		Chromaticity coordinates (x and y)	0,464 0,418
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1	Beam angle in degrees, or the range of beam angles that can be set	180
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	0	Survival factor	-
the lumen maintenance factor	-		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi$ 1)	0,96	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,3


(a) '-': not applicable;

(b) '-': not applicable;

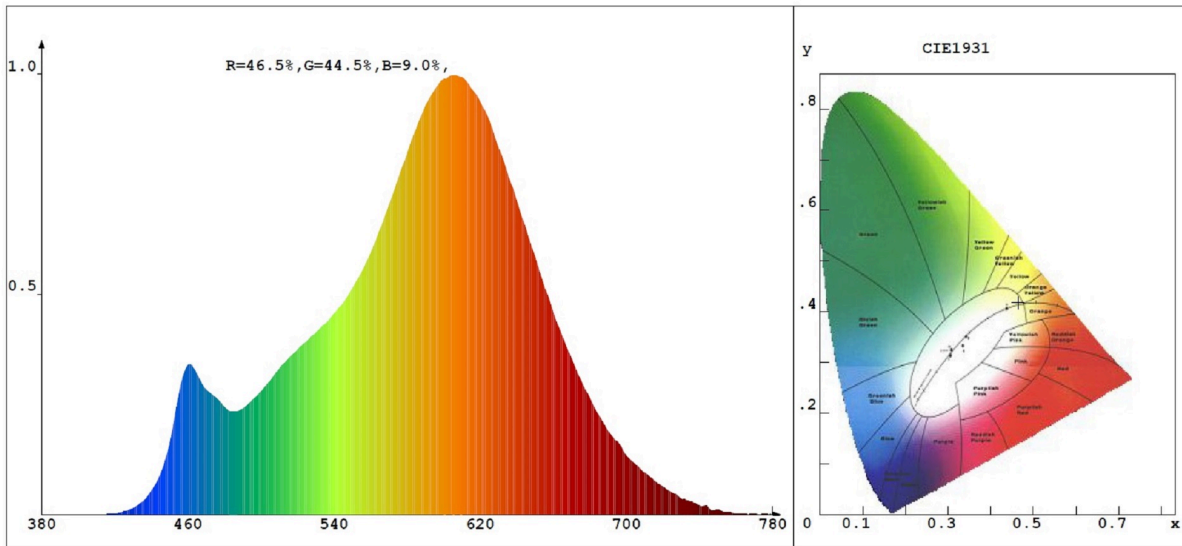

: x=0.4643 y=0.4181 u=0.2620 v=0.3539 duv=0.0024

Model placed on the Union market from 06/04/2020



**EPREL registration number:** 1007487

<https://eprel.ec.europa.eu/qr/1007487>

**Supplier:** ALLTERCO Robotics (Manufacturer)

**Website:** [www.allterco.com](http://www.allterco.com); [www.shelly.cloud](http://www.shelly.cloud)

**Customer care service:**

**Name:** Allterco

**Website:** [www.shelly.cloud/](http://www.shelly.cloud/)

**Email:** [support@shelly.cloud](mailto:support@shelly.cloud)

**Phone:** +359 2 988 7435

**Address:**

Cherni Vrh Boulevard 103  
1407 Sofia  
Bulgaria