

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Shelly

Supplier's address: Allterco, Cherni Vrh Boulevard 103, 1407 Sofia, BG

Model identifier: 3800235262115

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	E27/E26		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,50
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	160	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	64	
	Depth	64	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	100
		Chromaticity coordinates (x and y)	0,451 0,409
Parameters for directional light sources:			
Peak luminous intensity (cd)	1	Beam angle in degrees, or the range of beam angles that can be set	180
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,97	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,3


(a) '-': not applicable;

(b) '-': not applicable;

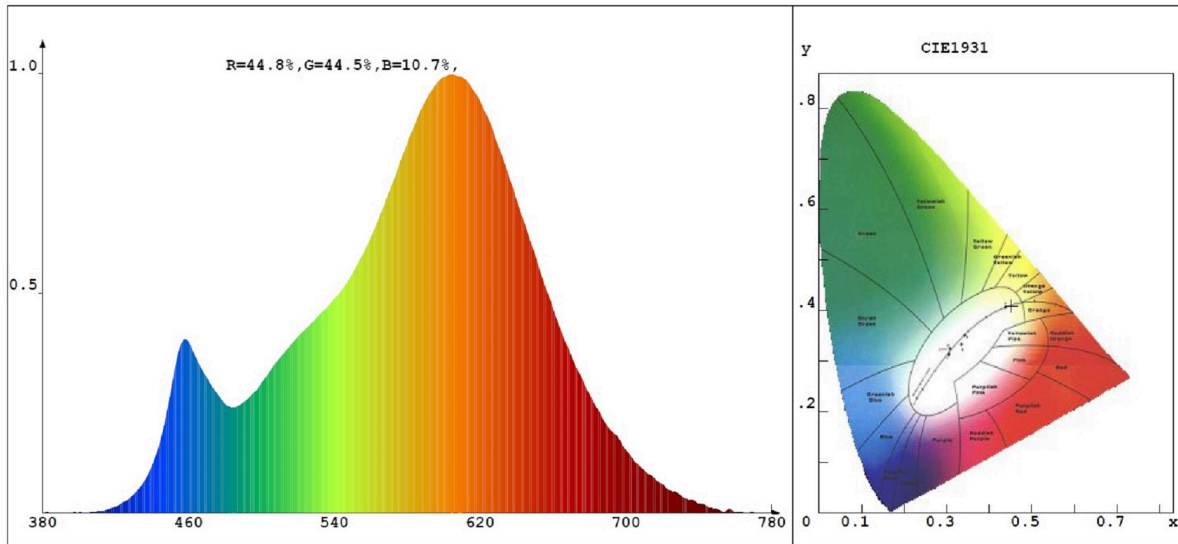

:x=0.4518 y=0.4095 u=0.2578 v=0.3505 duv=0.0003

Model placed on the Union market from 06/04/2020



EPREL registration number: 1007490

<https://eprel.ec.europa.eu/qr/1007490>

Supplier: ALLTERCO Robotics (Manufacturer)

Website: www.allterco.com; www.shelly.cloud

Customer care service:

Name: Allterco

Website: www.shelly.cloud/

Email: support@shelly.cloud

Phone: +359 2 988 7435

Address:

Cherni Vrh Boulevard 103
1407 Sofia
Bulgaria